



N9020A MXA  
X-Series Signal Analyzer  
10 Hz to 3.6, 8.4, 13.6, or 26.5 GHz

Data Sheet



# Table of Contents

|   |    |
|---|----|
| Definitions and Conditions .....                  | 3  |
| Frequency and Time Specifications .....           | 4  |
| Amplitude Accuracy and Range Specifications ..... | 6  |
| Dynamic Range Specifications .....                | 8  |
| PowerSuite Measurement Specifications .....       | 12 |
| General Specifications .....                      | 13 |
| Inputs and Outputs .....                          | 14 |
| Related Literature .....                          | 18 |

## Accelerate to market

Every device demands decisions that require tradeoffs in your goals—customer specs, throughput, yield. With a highly flexible signal analyzer, you can manage and minimize those tradeoffs. Agilent’s mid-performance MXA is the ultimate accelerator as your products move from design to the marketplace. It has the flexibility to quickly adapt to your evolving test requirements—today and tomorrow. Maximize your flexibility, and accelerate to market, with the Agilent MXA signal analyzer.

# Definitions and Conditions

Specifications describe the performance of parameters covered by the product warranty and apply to the full temperature range of 0 to 55 °C<sup>1</sup>, unless otherwise noted.

95th percentile values indicate the breadth of the population (approx.  $2\sigma$ ) of performance tolerances expected to be met in 95 percent of the cases with a 95 percent confidence, for any ambient temperature in the range of 20 to 30 °C. In addition to the statistical observations of a sample of instruments, these values include the effects of the uncertainties of external calibration references. These values are not warranted. These values are updated occasionally if a significant change in the statistically observed behavior of production instruments is observed.

Typical describes additional product performance information that is not covered by the product warranty. It is performance beyond specifications that 80 percent of the units exhibit with a 95 percent confidence level over the temperature range 20 to 30 °C. Typical performance does not include measurement uncertainty.

Nominal values indicate expected performance, or describe product performance that is useful in the application of the product, but are not covered by the product warranty.

The analyzer will meet its specifications when:

- It is within its calibration cycle
- Under auto couple control, except when Auto Sweep Time Rules = Accy
- Signal frequencies < 10 MHz, with DC coupling applied
- The analyzer has been stored at an ambient temperature within the allowed operating range for at least two hours before being turned on; if it had previously been stored at a temperature range inside the allowed storage range, but outside the allowed operating range
- The analyzer has been turned on at least 30 minutes with Auto Align set to normal, or, if Auto Align is set to off or partial, alignments must have been run recently enough to prevent an Alert message; if the Alert condition is changed from Time and Temperature to one of the disabled duration choices, the analyzer may fail to meet specifications without informing the user

1. For earlier instruments (Serial number prefix < MY/SG/US5051), the full temperature ranges from 5 to 50 °C.

This MXA signal analyzer data sheet is a summary of the complete specifications and conditions, which are available in the MXA Signal Analyzer Specification Guide. The MXA Signal Analyzer Specification Guide can be obtained on the web at:

[www.agilent.com/find/mxa\\_manuals](http://www.agilent.com/find/mxa_manuals)

For ordering information, refer to the MXA Signal Analyzer Configuration Guide (5989-4943EN).

# Frequency and Time Specifications

| Frequency range  | DC coupled   | AC coupled   |
|--|--|--|
| Option 503   | 10 Hz to 3.6 GHz   | 10 MHz to 3.6 GHz  |
| Option 508   | 10 Hz to 8.4 GHz   | 10 MHz to 8.4 GHz  |
| Option 513   | 10 Hz to 13.6 GHz  | 10 MHz to 13.6 GHz   |
| Option 526   | 10 Hz to 26.5 GHz  | 10 MHz to 26.5 GHz   |
| Band   | LO multiple (N)  |  |
| 0  | 1  | 10 Hz to 3.6 GHz   |
| 1  | 1  | 3.5 to 8.4 GHz   |
| 2  | 2  | 8.3 to 13.6 GHz  |
| 3  | 2  | 13.5 to 17.1 GHz   |
| 4  | 4  | 17 to 26.5 GHz   |
| Frequency reference  |  |  |
| Accuracy   | ± [(time since last adjustment x aging rate) + temperature stability + calibration accuracy]                           |  |
| Aging rate   | Option PFR<br>± 1 x 10 <sup>-7</sup> / year<br>± 1.5 x 10 <sup>-7</sup> / 2 years                                      | Standard<br>± 1 x 10 <sup>-6</sup> / year                    |
| Temperature stability<br>20 to 30 °C<br>Full temperature range   | Option PFR<br>± 1.5 x 10 <sup>-8</sup><br>± 5 x 10 <sup>-8</sup>   | Standard<br>± 2 x 10 <sup>-6</sup><br>± 2 x 10 <sup>-6</sup> |
| Achievable initial calibration accuracy  | Option PFR<br>± 4 x 10 <sup>-8</sup>   | Standard<br>± 1.4 x 10 <sup>-6</sup>                         |
| Example frequency reference accuracy<br>(with Option PFR)<br>1 year after last adjustment  | = ± (1 x 1 x 10 <sup>-7</sup> + 5 x 10 <sup>-8</sup> + 4 x 10 <sup>-8</sup> )<br>= ± 1.9 x 10 <sup>-7</sup>            |  |
| Residual FM<br>Option PFR<br>Standard  | ≤ (0.25 Hz x N) p-p in 20 ms nominal<br>≤ (10 Hz x N) p-p in 20 ms nominal<br>See band table above for N (LO multiple) |  |
| Frequency readout accuracy (start, stop, center, marker)   |  |  |
| ± (marker frequency x frequency reference accuracy + 0.25 % x span + 5 % x RBW + 2 Hz + 0.5 x horizontal resolution <sup>1</sup> ) |  |  |
| Marker frequency counter   |  |  |
| Accuracy   | ± (marker frequency x frequency reference accuracy + 0.100 Hz)   |  |
| Delta counter accuracy   | ± (delta frequency x frequency reference accuracy + 0.141 Hz)  |  |
| Counter resolution   | 0.001 Hz   |  |
| Frequency span (FFT and swept mode)  |  |  |
| Range  | 0 Hz (zero span), 10 Hz to maximum frequency of instrument   |  |
| Resolution   | 2 Hz   |  |
| Accuracy<br>Swept<br>FFT   | ± (0.25 % x span + horizontal resolution)<br>± (0.10 % x span + horizontal resolution)                                 |  |

1. Horizontal resolution is span/(sweep points - 1).

| Sweep time and triggering                  |   |   |
|--|---|---|
| Range                                      | Span = 0 Hz<br>Span ≥ 10 Hz   | 1 μs to 6000 s<br>1 ms to 4000 s  |
| Accuracy                                   | Span ≥ 10 Hz, swept<br>Span ≥ 10 Hz, FFT<br>Span = 0 Hz   | ± 0.01 % nominal<br>± 40 % nominal<br>± 0.01 % nominal  |
| Trigger                                    | Free run, line, video, external 1, external 2, RF burst, periodic timer   |   |
| Trigger delay                              | Span = 0 Hz or FFT<br>Span ≥ 10 Hz, swept<br>Resolution   | –150 to +500 ms<br>0 to 500 ms<br>0.1 μs  |
| Time gating                                |   |   |
| Gate methods                               | Gated LO; gated video; gated FFT  |   |
| Gate length range (except method = FFT)    | 100.0 ns to 5.0 s   |   |
| Gate delay range                           | 0 to 100.0 s  |   |
| Gate delay jitter                          | 33.3 ns p-p nominal   |   |
| Sweep (trace) point range                  |   |   |
| All spans                                  | 1 to 40001  |   |
| Resolution bandwidth (RBW)                 |   |   |
| Range (–3.01 dB bandwidth)                 | 1 Hz to 3 MHz (10 % steps), 4, 5, 6, 8 MHz  |   |
| Bandwidth accuracy (power)                 | 1 Hz to 750 kHz<br>820 kHz to 1.2 MHz (< 3.6 GHz CF)<br>1.3 to 2 MHz (< 3.6 GHz CF)<br>2.2 to 3 MHz (< 3.6 GHz CF)<br>4 to 8 MHz (< 3.6 GHz CF) | ± 1.0 % (±0.044 dB)<br>± 2.0 % (±0.088 dB)<br>± 0.07 dB nominal<br>± 0.15 dB nominal<br>± 0.25 dB nominal |
| Bandwidth accuracy (–3.01 dB)<br>RBW range | 1 Hz to 1.3 MHz   | ± 2 % nominal   |
| Selectivity (–60 dB/–3 dB)                 | 4.1:1 nominal   |   |
| EMI bandwidth (CISPR compliant)            | 200 Hz, 9 kHz, 120 kHz, 1 MHz   | (Option EMC or N6141A required)   |
| EMI bandwidth (MIL STD 461E compliant)     | 10 Hz, 100 Hz, 1 kHz, 10 kHz,<br>100 kHz, 1 MHz (standard)  | (Option EMC or N6141A required)   |
| Analysis bandwidth <sup>1</sup>            |   |   |
| Maximum bandwidth                          | Option B40<br>Option B25 (standard)<br>Standard   | 40 MHz<br>25 MHz<br>10 MHz  |
| Video bandwidth (VBW)                      |   |   |
| Range                                      | 1 Hz to 3 MHz (10 % steps), 4, 5, 6, 8 MHz, and wide open (labeled 50 MHz)  |   |
| Accuracy                                   | ± 6 % nominal   |   |
| Measurement speed <sup>2</sup>             |   |   |
| Local measurement and display update rate  | Standard<br>4 ms (250/s) nominal  |   |
| Remote measurement and LAN transfer rate   | 5 ms (200/s) nominal  |   |
| Marker peak search                         | 1.5 ms nominal  |   |
| Center frequency tune and transfer (RF)    | 20 ms nominal   |   |
| Center frequency tune and transfer (μW)    | 47 ms nominal   |   |
| Measurement/mode switching                 | 39 ms nominal   |   |

1. Analysis bandwidth is the instantaneous bandwidth available around a center frequency over which the input signal can be digitized for further analysis or processing in the time, frequency, or modulation domain.
2. Sweep points = 101. Apply for instruments with S/N prefix ≥ MY/SG/US4910 or earlier instruments with Option PC2 or PC4. Otherwise, refer to the MXA specification guide.

# Amplitude Accuracy and Range Specifications

| Amplitude range  |  |  |               |
|--|--|--|---------------|
| Measurement range  | Displayed average noise level (DANL) to maximum safe input level                                 |  |               |
| Input attenuator range   | 0 to 70 dB in 2 dB steps   |  |               |
| Electronic attenuator (Option EA3)   |  |  |               |
| Frequency range  | 10 Hz to 3.6 GHz   |  |               |
| Attenuation range  |  |  |               |
| Electronic attenuator range  | 0 to 24 dB, 1 dB steps   |  |               |
| Full attenuation range<br>(mechanical + electronic)  | 0 to 94 dB, 1 dB steps   |  |               |
| Maximum safe input level   |  |  |               |
| Average total power<br>(with and without preamp)   | +30 dBm (1 W)  |  |               |
| Peak pulse power   | < 10 $\mu$ s pulse width, < 1 % duty cycle +50 dBm (100 W) and input attenuation $\geq$ 30 dB    |  |               |
| DC volts   |  |  |               |
| DC coupled   | $\pm$ 0.2 Vdc  |  |               |
| AC coupled   | $\pm$ 100 Vdc  |  |               |
| Display range  |  |  |               |
| Log scale  | 0.1 to 1 dB/division in 0.1 dB steps<br>1 to 20 dB/division in 1 dB steps (10 display divisions) |  |               |
| Linear scale   | 10 divisions   |  |               |
| Scale units  | dBm, dBmV, dB $\mu$ V, dBmA, dB $\mu$ A, V, W, A   |  |               |
| Frequency response   | Specification  | 95th percentile ( $\approx$ 2 $\sigma$ ) |               |
| (10 dB input attenuation, 20 to 30 °C, preselector centering applied, $\sigma$ = nominal standard deviation) |  |  |               |
|  | 20 Hz to 10 MHz  | $\pm$ 0.6 dB                             | $\pm$ 0.28 dB |
|  | 10 MHz <sup>1</sup> to 3.6 GHz   | $\pm$ 0.45 dB                            | $\pm$ 0.17 dB |
|  | 3.5 to 8.4 GHz   | $\pm$ 1.5 dB                             | $\pm$ 0.48 dB |
|  | 8.3 to 13.6 GHz  | $\pm$ 2.0 dB                             | $\pm$ 0.47 dB |
|  | 13.5 to 22.0 GHz   | $\pm$ 2.0 dB                             | $\pm$ 0.52 dB |
|  | 22.0 to 26.5 GHz   | $\pm$ 2.5 dB                             | $\pm$ 0.71 dB |
| Preamp on<br>(0 dB attenuation) <sup>2</sup>   | 100 kHz to 3.6 GHz   | $\pm$ 0.75 dB                            | $\pm$ 0.28 dB |
|  | 3.5 to 8.4 GHz   | $\pm$ 2.0 dB                             | $\pm$ 0.67 dB |
|  | 8.3 to 13.6 GHz  | $\pm$ 2.3 dB                             | $\pm$ 0.73 dB |
|  | 13.5 to 17.1 GHz   | $\pm$ 2.5 dB                             | $\pm$ 0.97 dB |
|  | 17.0 to 22.0 GHz   | $\pm$ 2.5 dB                             | $\pm$ 1.36 dB |
|  | 22.0 to 26.5 GHz   | $\pm$ 3.5 dB                             | $\pm$ 1.48 dB |

1. DC coupling required to meet specifications below 50 MHz. With AC coupling, specifications apply at frequencies of 50 MHz and higher. Statistical observations at 10 MHz with AC coupling show that most instruments meet the DC-coupled specifications, however, a small percentage of instruments are expected to have errors exceeding 0.5 dB at 10 MHz at the temperature extreme. The effect at 20 to 50 MHz is negligible but not warranted.
2. Apply for instruments with S/N prefix  $\geq$  MY/SG/US5051. For older instruments, refer to the MXA Specification Guide.

| Input attenuation switching uncertainty  |   | Specifications   | Additional information |
|--|---|--|------------------------|
| Attenuation > 2 dB , preamp off<br>Relative to 10 dB<br>(reference setting)  | 50 MHz (reference frequency)  | ± 0.20 dB  | ± 0.08 dB typical      |
|  | 20 Hz to 3.6 GHz  |  | ± 0.3 dB nominal       |
|  | 3.5 to 8.4 GHz  |  | ± 0.5 dB nominal       |
|  | 8.3 to 13.6 GHz   |  | ± 0.7 dB nominal       |
|  | 13.5 to 26.5 GHz  |  | ± 0.7 dB nominal       |
| Total absolute amplitude accuracy  |   |  |                        |
| (10 dB attenuation, 20 to 30 °C, 1 Hz ≤ RBW ≤ 1 MHz, input signal –10 to –50 dBm, all settings auto-coupled except Auto Swp Time = Accy, any reference level, any scale, σ = nominal standard deviation) |   |  |                        |
|  | At 50 MHz   | ± 0.33 dB  |                        |
|  | At all frequencies<br>20 Hz to 3.6 GHz                                      | ± (0.33 dB + frequency response)<br>± 0.23 dB (95th Percentile ≈ 2σ)                   |                        |
| Preamp on  | At all frequencies  | ± (0.39 dB + frequency response)   |                        |
| Input voltage standing wave ratio (VSWR) (≥ 10 dB input attenuation)   |   |  |                        |
|  | 10 MHz to 3.6 GHz   | < 1.2:1 nominal  |                        |
|  | 3.6 to 8.4 GHz  | < 1.5:1 nominal  |                        |
|  | 8.4 to 13.6 GHz   | < 1.6:1 nominal  |                        |
|  | 13.6 to 26.5 GHz  | < 1.9:1 nominal  |                        |
| Preamp on<br>(0 dB attenuation)  | 10 MHz to 3.6 GHz   | < 1.7:1 nominal  |                        |
|  | 3.6 to 8.4 GHz  | < 1.8:1 nominal  |                        |
|  | 8.4 to 13.6 GHz   | < 2.0:1 nominal  |                        |
|  | 13.6 to 26.5 GHz  | < 2.0:1 nominal  |                        |
| Resolution bandwidth switching uncertainty (referenced to 30 kHz RBW)  |   |  |                        |
| 1 Hz to 1.5 MHz RBW  |   | ± 0.05 dB  |                        |
| 1.6 MHz to 3 MHz RBW   |   | ± 0.10 dB  |                        |
| 4, 5, 6, 8 MHz RBW   |   | ± 1.0 dB   |                        |
| Reference level  |   |  |                        |
| Range  |   |  |                        |
| Log scale  |   | –170 to +30 dBm in 0.01 dB steps   |                        |
| Linear scale   |   | Same as Log (707 pV to 7.07 V)   |                        |
| Accuracy   |   | 0 dB   |                        |
| Display scale switching uncertainty  |   |  |                        |
| Switching between linear and log   |   | 0 dB   |                        |
| Log scale/div switching  |   | 0 dB   |                        |
| Display scale fidelity   |   |  |                        |
| Between –10 dBm and –80 dBm<br>input mixer level   |   | ± 0.10 dB total  |                        |
| Trace detectors  |   |  |                        |
| Normal, peak, sample, negative peak, log power average, RMS average, and voltage average   |   |  |                        |
| Preamplifier   |   |  |                        |
| Frequency range  | Option P03<br>Option P08<br>Option P13<br>Option P26                        | 100 kHz to 3.6 GHz<br>100 kHz to 8.4 GHz<br>100 kHz to 13.6 GHz<br>100 kHz to 26.5 GHz |                        |
| Gain   | 100 kHz to 3.6 GHz<br>3.6 to 26.5 GHz                                       | +20 dB nominal<br>+35 dB nominal   |                        |
| Noise figure   | 100 kHz to 3.6 GHz<br>3.6 to 8.4 GHz<br>8.4 to 13.6 GHz<br>13.6 to 26.5 GHz | 11 dB nominal<br>9 dB nominal<br>10 dB nominal<br>15 dB nominal                        |                        |

# Dynamic Range Specifications

| 1 dB gain compression (two-tone)  |                                       | Total power at input mixer             |                  |
|---|---------------------------------------|--|------------------|
|   | 20 to 500 MHz                         | 0 dBm                                  | +3 dBm nominal   |
|   | 500 MHz to 3.6 GHz                    | 3 dBm                                  | +7 dBm nominal   |
|   | 3.6 to 26.5 GHz                       | 0 dBm                                  | +4 dBm nominal   |
| Preamp on<br>(Option P03, P08, P13, P26)  | 10 MHz to 3.6 GHz                     |  | -10 dBm nominal  |
|   | 3.6 to 26.5 GHz                       |  |                  |
|   | Tone spacing 100 kHz to 20 MHz        |  | -26 dBm nominal  |
|   | Tone spacing > 70 MHz                 |  | -16 dBm nominal  |
| Displayed average noise level (DANL)  |                                       |  |                  |
| (Input terminated, sample or average detector, averaging type = Log, 0 dB input attenuation, IF Gain = High, 20 to 30 °C) |                                       |  |                  |
|   |                                       | Specification                          | Typical          |
|   | 9 kHz to 1 MHz                        |  | -130 dBm         |
|   | 1 to 10 MHz                           | -150 dBm                               | -153 dBm         |
|   | 10 MHz to 2.1 GHz                     | -151 dBm                               | -154 dBm         |
|   | 2.1 to 3.6 GHz                        | -149 dBm                               | -152 dBm         |
|   | 3.6 to 8.4 GHz                        | -149 dBm                               | -153 dBm         |
|   | 8.4 to 13.6 GHz                       | -148 dBm                               | -151 dBm         |
|   | 13.6 to 17.1 GHz                      | -144 dBm                               | -147 dBm         |
|   | 17.1 to 20.0 GHz                      | -143 dBm                               | -146 dBm         |
|   | 20.0 to 26.5 GHz                      | -136 dBm                               | -142 dBm         |
| Preamp on<br>(Option P03, P08, P13, P26)  | 100 kHz to 1 MHz                      |  | -149 dBm nominal |
|   | 1 to 10 MHz                           | -161 dBm                               | -163 dBm         |
|   | 10 MHz to 2.1 GHz                     | -163 dBm                               | -166 dBm         |
|   | 2.1 to 3.6 GHz                        | -162 dBm                               | -164 dBm         |
|   | 3.6 to 8.4 GHz                        | -162 dBm                               | -166 dBm         |
|   | 8.4 to 13.6 GHz                       | -162 dBm                               | -165 dBm         |
|   | 13.6 to 17.1 GHz                      | -159 dBm                               | -163 dBm         |
|   | 17.1 to 20.0 GHz                      | -157 dBm                               | -161 dBm         |
|   | 20.0 to 26.5 GHz                      | -152 dBm                               | -157 dBm         |
| Spurious responses  |                                       |  |                  |
| Residual responses (Input terminated and 0 dB attenuation)  | 200 kHz to 8.4 GHz (swept)            | -100 dBm                               |                  |
|   | Zero span or FFT or other frequencies | -100 dBm nominal                       |                  |
| Image responses   | 10 MHz to 3.6 GHz                     | -80 dBc (-107 dBc typical)             |                  |
|   | 3.6 to 13.6 GHz                       | -78 dBc (-88 dBc typical)              |                  |
|   | 13.6 to 17.1 GHz                      | -74 dBc (-85 dBc typical)              |                  |
|   | 17.1 to 22 GHz                        | -70 dBc (-82 dBc typical)              |                  |
|   | 22 to 26.5 GHz                        | -68 dBc (-78 dBc typical)              |                  |
| LO related spurious<br>(f > 600 MHz from carrier)   | 10 MHz to 3.6 GHz                     | -90 dBc + 20xlogN <sup>1</sup> typical |                  |
| Other spurious<br>f ≥ 10 MHz from carrier   |                                       | -80 dBc + 20xlogN <sup>1</sup>         |                  |

1. N is the LO multiplication factor.



| Second harmonic distortion (SHI)  |                    |                  |                 |                 |
|---|--------------------|------------------|-----------------|-----------------|
|   | Source frequency   | Mixer level      | Distortion      | SHI             |
|   | 10 MHz to 1.25 GHz | -15 dBm          | -60 dBc         | +45 dBm         |
|   | 1.25 to 1.8 GHz    | -15 dBm          | -56 dBc         | +41 dBm         |
|   | 1.75 to 7 GHz      | -15 dBm          | -80 dBc         | +65 dBm         |
|   | 7 to 11 GHz        | -15 dBm          | -70 dBc         | +55 dBm         |
|   | 11 to 13.25 GHz    | -15 dBm          | -65 dBc         | +50 dBm         |
|   |                    | Preamp level     | Distortion      | SHI             |
| Preamp on<br>(Option P03, P08, P13, P26)  | 10 MHz to 1.8 GHz  | -45 dBm          | -78 dBc nominal | +33 dBm nominal |
|   | 1.8 to 13.25 GHz   | -50 dBm          | -60 dBc nominal | +10 dBm nominal |
| Third-order intermodulation distortion (TOI)  |                    |                  |                 |                 |
| (Two -30 dBm tones at input mixer with tone separation > 5 times IF prefilter bandwidth, 20 to 30 °C, see Specifications Guide for IF prefilter bandwidths) |                    |                  |                 |                 |
|   |                    | Distortion       | TOI             | TOI (typical)   |
|   | 10 to 100 MHz      | -84 dBc          | +12 dBm         | +17 dBm         |
|   | 100 to 400 MHz     | -90 dBc          | +15 dBm         | +20 dBm         |
|   | 400 MHz to 1.7 GHz | -92 dBc          | +16 dBm         | +20 dBm         |
|   | 1.7 to 3.6 GHz     | -92 dBc          | +16 dBm         | +19 dBm         |
|   | 3.6 to 8.4 GHz     | -90 dBc          | +15 dBm         | +18 dBm         |
|   | 8.4 to 13.6 GHz    | -90 dBc          | +15 dBm         | +18 dBm         |
|   | 13.6 to 26.5 GHz   | -80 dBc          | +10 dBm         | +14 dBm         |
| Preamp on (two -45 dBm tones at preamp input)   | 10 to 500 MHz      | -98 dBc nominal  |                 | +4 dBm nominal  |
|   | 500 MHz to 3.6 GHz | -100 dBc nominal |                 | +5 dBm nominal  |
|   | 3.6 to 26.5 GHz    | -70 dBc nominal  |                 | -15 dBm nominal |

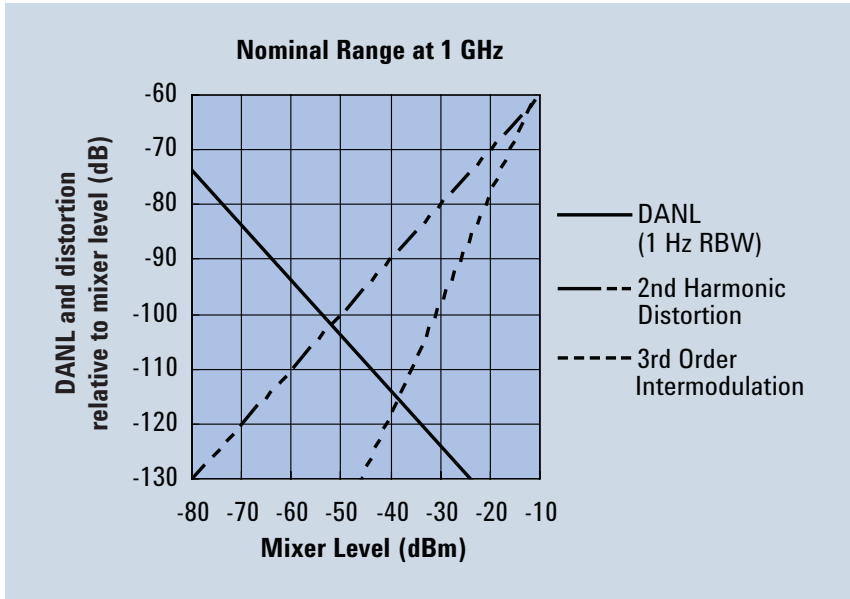


Figure 1. Nominal dynamic range – Band 0, for second and third order distortion, 20 Hz to 3.6 GHz

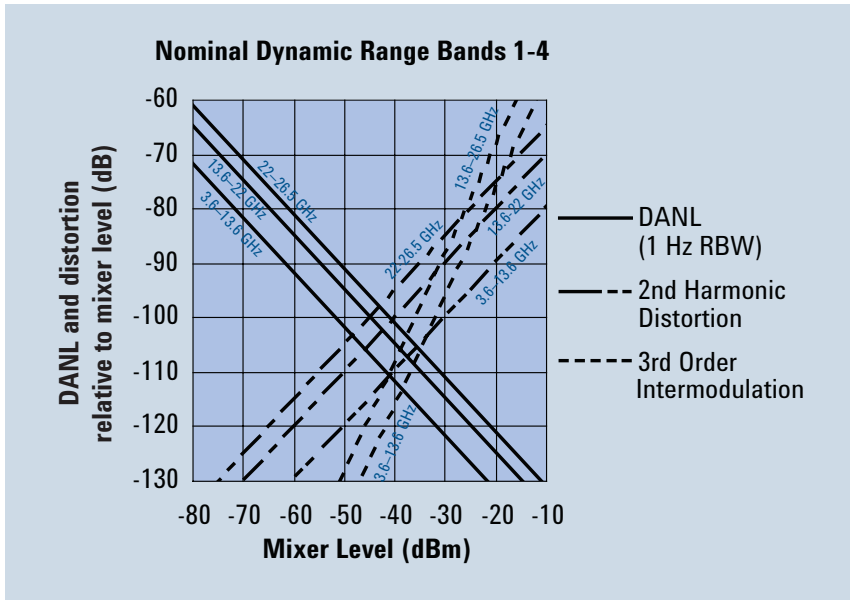


Figure 2. Nominal dynamic range – Bands 1 to 4, for second and third order distortion, 3.6 GHz to 26.5 GHz

| Phase noise <sup>1</sup>                     | Offset  | Specification | Typical             |
|--|---------|---------------|---------------------|
| Noise sidebands<br>(20 to 30 °C, CF = 1 GHz) | 100 Hz  | -84 dBc/Hz    | -88 dBc/Hz          |
|  | 1 kHz   |               | -101 dBc/Hz nominal |
|  | 10 kHz  | -103 dBc/Hz   | -106 dBc/Hz         |
|  | 100 kHz | -115 dBc/Hz   | -117 dBc/Hz         |
|  | 1 MHz   | -135 dBc/Hz   | -137 dBc/Hz         |
|  | 10 MHz  |               | -148 dBc/Hz nominal |

1. For nominal values, refer to Figure 3.

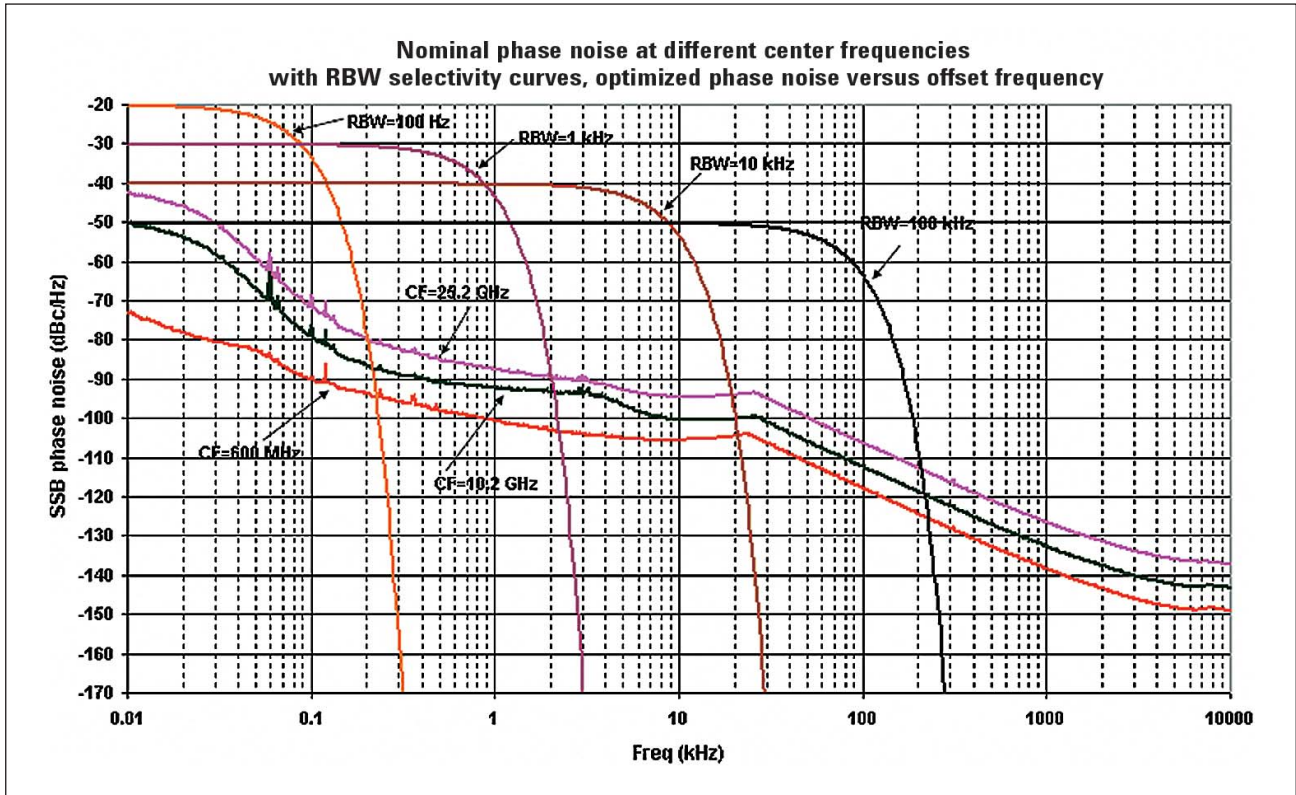


Figure 3. Nominal phase noise at different center frequencies

# PowerSuite Measurement Specifications

| Channel power  |   |                      |
|--|---|----------------------|
| Amplitude accuracy, W-CDMA or IS95 (20 to 30 °C, attenuation = 10 dB)      | ± 0.80 dB (± 0.30 dB 95th percentile)   |                      |
| Occupied bandwidth   |   |                      |
| Frequency accuracy   | ± [span/1000] nominal   |                      |
| Adjacent channel power   |   |                      |
| Accuracy, W-CDMA (ACLR) (at specific mixer levels and ACLR ranges)         | Adjacent  | Alternate            |
| MS   | ± 0.14 dB   | ± 0.21 dB            |
| BTS  | ± 0.49 dB   | ± 0.44 dB            |
| Dynamic range (typical)  |   |                      |
| Without noise correction   | -73 dB  | -79 dB               |
| With noise correction  | -78 dB  | -82 dB               |
| Offset channel pairs measured  | 1 to 6  |                      |
| ACP measurement and transfer time (fast method)                            | 14 ms nominal ( $\sigma = 0.2$ dB)  |                      |
| Multiple number of carriers measured                                       | Up to 12  |                      |
| Power statistics CCDF  |   |                      |
| Histogram resolution   | 0.01 dB   |                      |
| Harmonic distortion  |   |                      |
| Maximum harmonic number  | 10th  |                      |
| Result   | Fundamental power (dBm), relative harmonics power (dBc), total harmonic distortion in %                 |                      |
| Intermod (TOI)   | Measure the third-order products and intercepts from two tones  |                      |
| Burst power  |   |                      |
| Methods  | Power above threshold, power within burst width   |                      |
| Results  | Single burst output power, average output power, maximum power, minimum power within burst, burst width |                      |
| Spurious emission  |   |                      |
| W-CDMA (1 to 3.6 GHz) table-driven spurious signals; search across regions |   |                      |
| Dynamic range  | 96.7 dB   | (101.7 dB typical)   |
| Absolute sensitivity   | -84.4 dBm   | (-89.4 dBm typical)  |
| Spectrum emission mask (SEM)   |   |                      |
| cdma2000® (750 kHz offset)   |   |                      |
| Relative dynamic range (30 kHz RBW)  | 78.9 dB   | (85.0 dB typical)    |
| Absolute sensitivity   | -99.7 dBm   | (-104.7 dBm typical) |
| Relative accuracy  | ± 0.11 dB   |                      |
| 3GPP W-CDMA (2.515 MHz offset)   |   |                      |
| Relative dynamic range (30 kHz RBW)  | 81.9 dB   | (88.2 dB typical)    |
| Absolute sensitivity   | -99.7 dBm   | (-104.7 dBm typical) |
| Relative accuracy  | ± 0.12 dB   |                      |

# General Specifications

## Temperature range

|           |              |
|-----------|--------------|
| Operating | 0 to 55 °C   |
| Storage   | -40 to 70 °C |

## EMC

Complies with European EMC Directive 2004/108/EC

- IEC/EN 61326-1 or IEC/EN 61326-2-1
- CISPR Pub 11 Group 1, class A
- AS/NZS CISPR 11:2002
- ICES/NMB-001

This ISM device complies with Canadian ICES-001

Cet appareil ISM est conforme à la norme NMB-001 du Canada

## Safety

Complies with European Low Voltage Directive 73/23/EEC, amended by 93/68/EEC

- IEC/EN 61010-1 2nd Edition
- Canada: CSA C22.2 No. 61010-1
- USA: UL 61010-1 2nd Edition

## Audio noise

|                         |                     |
|-------------------------|---------------------|
| Acoustic noise emission | Geraeuschemission   |
| LpA < 70 dB             | LpA < 70 dB         |
| Operator position       | Am Arbeitsplatz     |
| Normal position         | Normaler Betrieb    |
| Per ISO 7779            | Nach DIN 45635 t.19 |

## Environmental stress

Samples of this product have been type tested in accordance with the Agilent Environmental Test Manual and verified to be robust against the environmental stresses of storage, transportation, and end-use; those stresses include, but are not limited to, temperature, humidity, shock, vibration, altitude, and power line conditions; test methods are aligned with IEC 60068-2 and levels are similar to MILPRF-28800F Class 3.

## Power requirements

|                                 |  |
|---------------------------------|--|
| Voltage and frequency (nominal) | 100 to 120 V, 50/60/400 Hz<br>220 to 240 V, 50/60 Hz |
| Power consumption               |  |
| On                              | 390 W maximum  |
| Standby                         | 20 W   |

## Display

|            |                                     |
|------------|-------------------------------------|
| Resolution | 1024 x 768, XGA                     |
| Size       | 213 mm (8.4 in.) diagonal (nominal) |

## Data storage

|          |   |
|----------|---|
| Internal | > = 80 GB nominal (removable solid state drive) |
| External | Supports USB 2.0 compatible memory devices      |

## Weight (without options)

|          |                        |
|----------|------------------------|
| Net      | 16 kg (35 lbs) nominal |
| Shipping | 28 kg (62 lbs) nominal |

## Dimensions

|        |                  |
|--------|------------------|
| Height | 177 mm (7.0 in)  |
| Width  | 426 mm (16.8 in) |
| Length | 368 mm (14.5 in) |

## Warranty

The MXA signal analyzer is supplied with a one-year warranty

## Calibration cycle

The recommended calibration cycle is two years; calibration services are available through Agilent service centers

# Inputs and Outputs

| Front panel   |  |
|---|--|
| RF input<br>Connector   | Type-N female, 50 $\Omega$ nominal   |
| Analog baseband IQ inputs (Option BBA/S40) <sup>1</sup><br>Connectors (I, Q, I-Bar, Q-Bar, and Cal Out)<br>Cal Out<br>Signal<br>Frequency<br>Input impedance (4 connectors: I, Q, I-, Q-)<br>Probes supported <sup>2</sup><br>Active probe<br>Passive probe<br>Input return loss<br>50 $\Omega$ impedance only selected | BNC female<br><br>AC coupled square wave<br>Selectable between 1 kHz and 250 kHz<br>50 $\Omega$ , 1 M $\Omega$ (selectable, nominal)<br>1130A, 1131A, 1132A, 1134A<br>1161A<br>–35 dB (0 to 10 MHz, nominal)<br>–30 dB (10 to 40 MHz, nominal) |
| Probe power<br>Voltage/current  | +15 Vdc, $\pm 7$ % at 150 mA max nominal<br>–12.6 Vdc, $\pm 10$ % at 150 mA max nominal  |
| USB 2.0 ports<br>Master (2 ports)<br>Standard<br>Connector<br>Output current  | Compatible with USB 2.0<br>USB Type-A female<br>0.5 A nominal  |
| Rear panel  |  |
| 10 MHz out<br>Connector<br>Output amplitude<br>Frequency  | BNC female, 50 $\Omega$ nominal<br>$\geq 0$ dBm nominal<br>10 MHz $\pm$ (10 MHz x frequency reference accuracy)  |
| Ext Ref In<br>Connector<br>Input amplitude range<br>Input frequency<br>Frequency lock range   | BNC female, 50 $\Omega$ nominal<br>–5 to 10 dBm nominal<br>1 to 50 MHz nominal<br>$\pm 5 \times 10^{-6}$ of specified external reference input frequency   |
| Trigger 1 and 2 inputs<br>Connector<br>Impedance<br>Trigger level range   | BNC female<br>> 10 k $\Omega$ nominal<br>–5 to 5 V   |
| Trigger 1 and 2 outputs<br>Connector<br>Impedance<br>Level  | BNC female<br>50 $\Omega$ nominal<br>5 V TTL nominal   |
| Monitor output<br>Connector<br>Format<br>Resolution   | VGA compatible, 15-pin mini D-SUB<br>XGA (60 Hz vertical sync rates, non-interlaced) Analog RGB<br>1024 x 768  |

1. For additional specifications, please refer to the MXA Signal Analyzer Option BBA: Analog Baseband IQ Inputs Technical Overview, literature number 5989-6538EN.

2. For more details, please refer to the Agilent Probe Configuration Guides, literature numbers 5968-7141EN and 5989-6162EN; probe heads are necessary to attach to your device properly and probe connectivity kits such as E2668B, E2669A, or E2675A are required.

| Rear panel  |  |
|---|--|
| Noise source drive +28 V (pulsed)<br>Connector  | BNC female   |
| SNS Series noise source   |  |
| Analog out<br>Connector   | BNC female (used by Option YAS)  |
| USB 2.0 ports<br>Master (4 ports)<br>Standard<br>Connector<br>Output current<br>Slave (1 port)<br>Standard<br>Connector<br>Output current | Compatible with USB 2.0<br>USB Type-A female<br>0.5 A nominal<br>Compatible with USB 2.0<br>USB Type-B female<br>0.5 A nominal |
| GPIB interface<br>Connector<br>GPIB codes<br>GPIB mode  | IEEE-488 bus connector<br>SH1, AH1, T6, SR1, RL1, PP0, DC1, C1, C2, C3, C28, DT1, L4, C0<br>Controller or device               |
| LAN TCP/IP interface<br>Standard<br>Connector   | 1000Base-T<br>RJ45 Ethertwist  |
| IF output<br>Connector<br>Impedance   | SMA female, shared by Option CR3 and CRP<br>50 $\Omega$ nominal  |
| Wideband IF output, Option CR3  |  |
| Center frequency<br>SA mode or I/Q analyzer with IF BW $\leq$ 25 MHz<br>with Option B40   | 322.5 MHz<br>250 MHz   |
| Conversion gain   | -1 to +4 dB (nominal) plus RF frequency response   |
| Bandwidth<br>Low band<br>High band, with preselector<br>High band, with preselector bypassed <sup>1</sup>                                 | Up to 140 MHz (nominal)<br>Depends on center frequency<br>Up to 410 MHz  |
| Programmable IF output, Option CRP  |  |
| Center frequency<br>Range<br>Resolution   | 10 to 75 MHz (user selectable)<br>0.5 MHz  |
| Conversion gain   | -1 to +4 dB (nominal) plus RF frequency response   |
| Bandwidth<br>Output at 70 MHz<br>Low band or high band with preselector bypassed <sup>1</sup><br>Preselected band                         | 100 MHz (nominal)<br>Depends on RF center frequency  |
| Lower output frequencies  | Subject to folding   |
| Residual output signals   | $\leq$ -88 dBm (nominal)   |

1. Option MPB installed and enabled.

# I/Q Analyzer

| Resolution bandwidth (spectrum measurement)  |                           |                  |              |               |
|--|---------------------------|------------------|--------------|---------------|
| Range  |                           |                  |              |               |
| Overall  | 100 mHz to 3 MHz          |                  |              |               |
| Span = 1 MHz   | 50 Hz to 1 MHz            |                  |              |               |
| Span = 10 kHz  | 1 Hz to 10 kHz            |                  |              |               |
| Span = 100 Hz  | 100 mHz to 100 Hz         |                  |              |               |
| Window shapes  |                           |                  |              |               |
| Flat top, Uniform, Hanning, Gaussian, Blackman, Blackman-Harris, Kaiser Bessel (K-B 70 dB, K-B 90 dB and K-B 110 dB) |                           |                  |              |               |
| Analysis bandwidth   |                           |                  |              |               |
| Standard   | 10 Hz to 10 MHz           |                  |              |               |
| Option B25 (standard)  | 10 Hz to 25 MHz           |                  |              |               |
| Option B40   | 10 Hz to 40 MHz           |                  |              |               |
| IF frequency response (standard 10 MHz IF path)  |                           |                  |              |               |
| IF frequency response (demodulation and FFT response relative to the center frequency, 20 to 30 °C)                  |                           |                  |              |               |
| Center frequency (GHz)   | Span (MHz)                | Preselector      | Max. error   | RMS (nominal) |
| ≤ 3.6  | ≤ 10                      | n/a              | ± 0.40 dB    | 0.04 dB       |
| 3.6 < f ≤ 26.5   | ≤ 10                      | on               |              | 0.25 dB       |
| 3.6 < f ≤ 26.5   | ≤ 10                      | off <sup>1</sup> | ± 0.45 dB    | 0.04 dB       |
| IF phase linearity (deviation from mean phase linearity, nominal)  |                           |                  |              |               |
| Center frequency (GHz)   | Span (MHz)                | Preselector      | Peak-to-peak | RMS           |
| ≤ 3.6  | ≤ 10                      | n/a              | 0.4 °        | 0.1 °         |
| 3.6 < f ≤ 26.5   | ≤ 10                      | on               | 1.0 °        | 0.2 °         |
| 3.6 < f ≤ 26.5   | ≤ 10                      | off <sup>1</sup> | 0.4 °        | 0.1 °         |
| Data acquisition (10 MHz IF path)  |                           |                  |              |               |
| Time record length   |                           |                  |              |               |
| IQ analyzer  | 4,000,000 IQ sample pairs |                  |              |               |
| Sample rate at ADC   |                           |                  |              |               |
| Option DP2, B40 or MPB   | 100 MSa/s                 |                  |              |               |
| None of the above  | 90 MSa/s                  |                  |              |               |
| ADC resolution   |                           |                  |              |               |
| Option DP2, B40 or MPB   | 16 bits                   |                  |              |               |
| None of the above  | 14 bits                   |                  |              |               |
| Option B25 (standard) 25 MHz analysis bandwidth  |                           |                  |              |               |
| IF frequency response (demodulation and FFT response relative to the center frequency, 20 to 30 °C)                  |                           |                  |              |               |
| Center frequency (GHz)   | Span (MHz)                | Preselector      | Max. error   | RMS (nominal) |
| ≤ 3.6  | 10 to ≤ 25                | n/a              | ± 0.45 dB    | 0.051 dB      |
| 3.6 < f ≤ 26.5   | 10 to ≤ 25                | on               |              | 0.45 dB       |
| 3.6 < f ≤ 26.5   | 10 to ≤ 25                | off <sup>1</sup> | ± 0.45 dB    | 0.05 dB       |

1. Option MPB is installed and enabled.



| IF phase linearity (deviation from mean phase linearity, nominal) |            |                  |              |              |
|---|------------|------------------|--------------|--------------|
| Center frequency (GHz)  | Span (MHz) | Preselector      | Peak-to-peak | RMS          |
| $0.02 \leq f < 3.6$   | $\leq 25$  | n/a              | $0.6^\circ$  | $0.14^\circ$ |
| $3.6 \leq f \leq 26.5$  | $\leq 25$  | on               | $4.5^\circ$  | $1.2^\circ$  |
| $3.6 \leq f \leq 26.5$  | $\leq 25$  | off <sup>1</sup> | $1.9^\circ$  | $0.42^\circ$ |

### Data acquisition (25 MHz IF path)

|  |   |                |        |  |
|--|---|----------------|--------|--|
| Time record length (IQ pairs)<br>IQ Analyzer | 4,000,000 IQ sample pairs                               |                |        |  |
| 89600 software or N9064A                     | 32-bit packing  | 64-bit packing | Memory |  |
| Option DP2, B40 or MPB                       | 536 MSa   | 268 MSa        | 2 GB   |  |
| None of the above                            | 4,000,000 IQ sample pairs (independent of data packing) |                |        |  |
| Sample rate at ADC<br>Option DP2, B40 or MPB | 100 MSa/s   |                |        |  |
| None of the above                            | 90 MSa/s  |                |        |  |
| ADC resolution<br>Option DP2, B40 or MPB     | 16 bits   |                |        |  |
| None of the above                            | 14 bits   |                |        |  |

### Option B40 40 MHz analysis bandwidth

| IF frequency response (demodulation and FFT response relative to the center frequency, 20 to 30 °C) |            |                  |               |               |
|---|------------|------------------|---------------|---------------|
| Center frequency (GHz)  | Span (MHz) | Preselector      | Max. error    | RMS (nominal) |
| $0.03 \leq f < 3.6$   | $\leq 40$  | n/a              | $\pm 0.3$ dB  | $\pm 0.08$ dB |
| $3.6 \leq f \leq 26.5$  | $\leq 40$  | off <sup>1</sup> | $\pm 0.25$ dB | $\pm 0.08$ dB |

| IF phase linearity (deviation from mean phase linearity, nominal) |            |                  |              |              |
|---|------------|------------------|--------------|--------------|
| Center frequency (GHz)  | Span (MHz) | Preselector      | Peak-to-peak | RMS          |
| $0.02 \leq f < 3.6$   | 40         | n/a              | $0.2^\circ$  | $0.05^\circ$ |
| $3.6 \leq f \leq 26.5$  | 40         | off <sup>1</sup> | $5^\circ$    | $1.4^\circ$  |

### Dynamic range (40 MHz IF path)

|   |                 |  |  |  |
|---|-----------------|--|--|--|
| SFDR (Spurious-free dynamic range)              |                 |  |  |  |
| Signal frequency within $\pm 12$ MHz of center  | -77 dBc nominal |  |  |  |
| Signal frequency anywhere within analysis BW    |                 |  |  |  |
| Spurious response within $\pm 18$ MHz of center | -74 dBc nominal |  |  |  |
| Response anywhere within analysis BW            | -74 dBc nominal |  |  |  |

### Data acquisition (40 MHz IF path)

|   |                               |                |  |  |
|---|-------------------------------|----------------|--|--|
| Time record length (IQ pairs)<br>IQ Analyzer    | 4,000,000 samples (I/Q pairs) |                |  |  |
| 89600 VSA software or N9064A VXA                | 32-bit packing                | 64-bit packing |  |  |
| Length (IQ sample pairs)<br>Length (time units) | 536 MSa                       | 268 MSa        | 2 GB total memory nominal<br>Samples/(Span x 1.25) nominal |  |
| Sample rate<br>At ADC<br>IQ pairs               | 200 MSa/s                     |                | Span x 1.25 nominal  |  |
| ADC resolution                                  | 12 bits                       |                |  |  |

1. Option MPB is installed and enabled.

# Related Literature

[www.agilent.com](http://www.agilent.com)

## Agilent MXA signal analyzers

*Brochure* 5989-5047EN

*Configuration Guide* 5989-4943EN

For more information or literature resources please visit the web:  
[www.agilent.com/find/mxa](http://www.agilent.com/find/mxa)



## Agilent Email Updates

[www.agilent.com/find/emailupdates](http://www.agilent.com/find/emailupdates)  
Get the latest information on the products and applications you select.



## [www.lxistandard.org](http://www.lxistandard.org)

LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. Agilent is a founding member of the LXI consortium.

## Agilent Channel Partners

[www.agilent.com/find/channelpartners](http://www.agilent.com/find/channelpartners)  
Get the best of both worlds: Agilent's measurement expertise and product breadth, combined with channel partner convenience.



Agilent Advantage Services is committed to your success throughout your equipment's lifetime. To keep you competitive, we continually invest in tools and processes that speed up calibration and repair and reduce your cost of ownership. You can also use Infoline Web Services to manage equipment and services more effectively. By sharing our measurement and service expertise, we help you create the products that change our world.

[www.agilent.com/find/advantageservices](http://www.agilent.com/find/advantageservices)



[www.agilent.com/quality](http://www.agilent.com/quality)

cdma2000® is a registered certification mark of the Telecommunications Industry Association. Used under license.

Windows® and MS Windows are U.S. registered trademarks of Microsoft® Corporation.

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:  
[www.agilent.com/find/contactus](http://www.agilent.com/find/contactus)

## Americas

|               |                |
|---------------|----------------|
| Canada        | (877) 894 4414 |
| Brazil        | (11) 4197 3600 |
| Mexico        | 01800 5064 800 |
| United States | (800) 829 4444 |

## Asia Pacific

|                    |                |
|--------------------|----------------|
| Australia          | 1 800 629 485  |
| China              | 800 810 0189   |
| Hong Kong          | 800 938 693    |
| India              | 1 800 112 929  |
| Japan              | 0120 (421) 345 |
| Korea              | 080 769 0800   |
| Malaysia           | 1 800 888 848  |
| Singapore          | 1 800 375 8100 |
| Taiwan             | 0800 047 866   |
| Other AP Countries | (65) 375 8100  |

## Europe & Middle East

|                |                      |
|----------------|----------------------|
| Belgium        | 32 (0) 2 404 93 40   |
| Denmark        | 45 45 80 12 15       |
| Finland        | 358 (0) 10 855 2100  |
| France         | 0825 010 700*        |
|                | *0.125 €/minute      |
| Germany        | 49 (0) 7031 464 6333 |
| Ireland        | 1890 924 204         |
| Israel         | 972-3-9288-504/544   |
| Italy          | 39 02 92 60 8484     |
| Netherlands    | 31 (0) 20 547 2111   |
| Spain          | 34 (91) 631 3300     |
| Sweden         | 0200-88 22 55        |
| United Kingdom | 44 (0) 118 927 6201  |

For other unlisted countries:

[www.agilent.com/find/contactus](http://www.agilent.com/find/contactus)

Revised: January 6, 2012

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2012  
Published in USA, February 7, 2012  
5989-4942EN



**Agilent Technologies**