



up to 67 GHz

up to 67 GHz

Version  
11.00  
July  
2007

# Spectrum Analyzer R&S®FSU

Data sheet



**ROHDE & SCHWARZ**

# CONTENTS

Frequency.....	3
Sweep.....	4
Resolution bandwidths .....	4
Level .....	5
I/Q data.....	9
Audio demodulation.....	9
Trigger functions.....	10
Inputs and outputs (front panel).....	10
Inputs and outputs (rear panel) .....	11
General specifications .....	12
R&S®FSU-B9 tracking generator, R&S®FSU-B12 attenuator for tracking generator (not available for R&S®FSU67).....	13
R&S®FSU-B21 LO/IF ports for external mixers (for R&S®FSU26/43/46/50/67 only).....	15
R&S®FSU-B23 RF preamplifier (for R&S®FSU26 only, requires R&S®FSU-B25 option) .....	15
R&S®FSU-B25 electronic attenuator.....	16
R&S®FSU-B27 broadband FM demodulator output.....	17
Ordering information .....	18
Options .....	18
Recommended extras .....	19

Specifications apply under the following conditions: 30 minutes warm-up time at ambient temperature, specified environmental conditions met, calibration cycle adhered to, and all internal automatic adjustments performed. Data without tolerances: typical values only. Data designated "nominal" applies to design parameters and is not tested.

## Frequency


<b>Frequency range</b>	R&S®FSU3:	DC coupled	20 Hz to 3.6 GHz
		AC coupled	1 MHz to 3.6 GHz
	R&S®FSU8:	DC coupled	20 Hz to 8 GHz
		AC coupled	1 MHz to 8 GHz
	R&S®FSU26:	DC coupled	20 Hz to 26.5 GHz
		AC coupled	10 MHz to 26.5 GHz
	R&S®FSU43:	DC coupled	20 Hz to 43 GHz
	R&S®FSU46:	DC coupled	20 Hz to 46 GHz
R&S®FSU50:	DC coupled	20 Hz to 50 GHz	
R&S®FSU67:	DC coupled	20 Hz to 67 GHz	
<b>Frequency resolution</b>			0.01 Hz

<b>Reference frequency, internal, nominal</b>	<b>standard OCXO</b>	
Aging per day	after 30 days of continuous operation	$1 \times 10^{-9}$
Aging per year	after 30 days of continuous operation	$1 \times 10^{-7}$
Temperature drift	+5 °C to +45 °C	$8 \times 10^{-8}$
Total error	per year	$1.8 \times 10^{-7}$
<b>Reference frequency, internal, nominal</b>	<b>R&amp;S®FSU-B4 option</b>	
Aging per day	after 30 days of continuous operation	$2 \times 10^{-10}$
Aging per year	after 30 days of continuous operation	$3 \times 10^{-8}$
Temperature drift	+5 °C to +45 °C	$1 \times 10^{-9}$
Total error	per year	$5 \times 10^{-8}$
<b>External reference frequency</b>		1 MHz to 20 MHz, 1 Hz steps

<b>Frequency display</b>		with marker or frequency counter
Marker resolution		span/624
Maximum deviation	sweep time >3 × auto sweep time	$\pm(\text{marker frequency} \times \text{reference error} + 0.5 \% \times \text{span} + 10 \% \times \text{resolution bandwidth} + \frac{1}{2} \text{ (last digit)})$
Frequency counter resolution	selectable	0.1 Hz to 10 kHz
Count accuracy	S/N >25 dB	$\pm(\text{frequency} \times \text{reference error} + \frac{1}{2} \text{ (last digit)})$
Display range for frequency axis		0 Hz, 10 Hz to max. frequency
Resolution		0.1 Hz
Max. span deviation		1 %

<b>Spectral purity, SSB phase noise (1 Hz)</b>	f = 640 MHz	
Residual FM	RBW 10 kHz, RMS	1 Hz nominal
Carrier offset	10 Hz	-73 dBc, nominal
	10 Hz with R&S®FSU-B4 option fitted	-86 dBc, nominal
	100 Hz	<-98 dBc <sup>1</sup> , <-90 dBc, typ. -104 dBc <sup>1</sup>
	1 kHz	<-116 dBc <sup>1</sup> , <-112dBc, typ. -124 dBc <sup>1</sup>
	10 kHz	<-128 dBc <sup>1</sup> , <-120 dBc, typ. -133 dBc <sup>1</sup>
	100 kHz	<-128 dBc <sup>1</sup> , <-120 dBc, typ. -133 dBc <sup>1</sup>
	1 MHz	<-140 dBc <sup>1</sup> , <-138 dBc, typ. -146 dBc <sup>1</sup>
	10 MHz	typ. -160 dBc

<sup>1</sup> Valid for R&S®FSU43, other models valid as of serial number 200000.

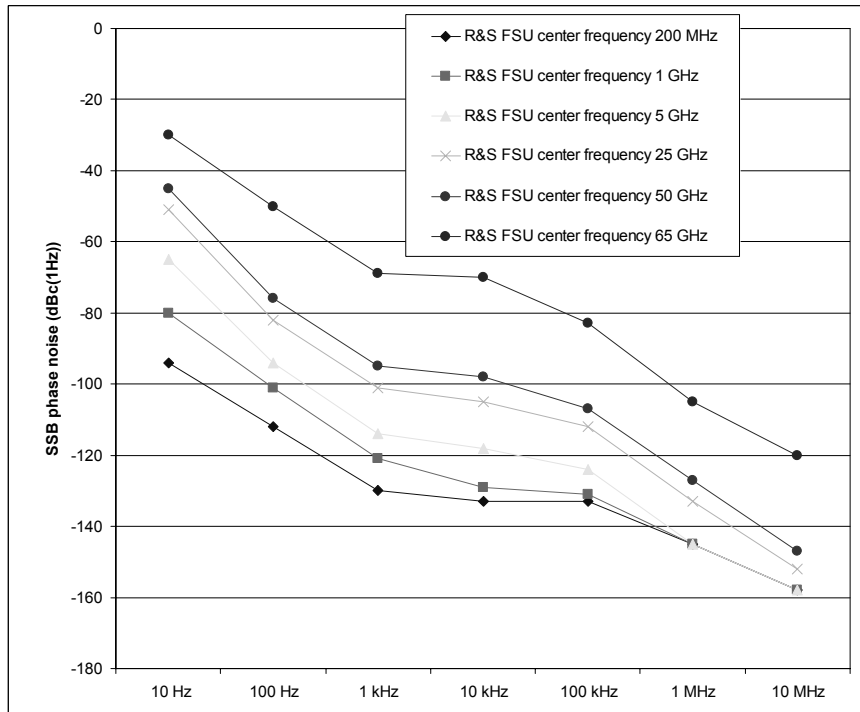

## Sweep

Sweep time	time sweep, span = 0 Hz	1 $\mu$ s to 16000 s in 5 % steps
	frequency sweep, span $\geq$ 10 Hz	2.5 ms to 16000 s in steps $\leq$ 10 %
Max. deviation of sweep time		3 %
Measurement in time domain		with marker and cursor lines (resolution 31.25 ns)

## Resolution bandwidths

Sweep filters		
3 dB bandwidths	all models except R&S <sup>®</sup> FSU43	10 Hz to 20 MHz in 1/2/3/5 sequence, 50 MHz
	R&S <sup>®</sup> FSU43	10 Hz to 10 MHz in 1/2/3/5 sequence
Bandwidth uncertainty	10 Hz to 100 kHz (digital)	<3 %
	200 kHz to 5 MHz (analog)	<10 %
	10 MHz	-30 % to +10 %
	20 MHz	-20 % to +20 %
	50 MHz, $f \leq$ 3.6 GHz	-20 % to +20 %
Shape factor 60 dB:3 dB	50 MHz, $f >$ 3.6 GHz	-30 % to +100 %
	$\leq$ 100 kHz	<6
	200 kHz to 2 MHz	<12
	3 MHz to 10 MHz	<7
20 MHz, 50 MHz	<6, nominal	

FFT filters		
3 dB bandwidths		1 Hz to 30 kHz in 1/2/3/5 sequence
Bandwidth uncertainty		5 %, nominal
Shape factor 60 dB:3 dB		<3, nominal

EMI filters		
6 dB bandwidths		10 Hz, 100 Hz, 200 Hz, 1 kHz, 9 kHz, 10 kHz, 100 kHz, 120 kHz, 1 MHz
Bandwidth uncertainty	$\leq$ 120 kHz (digital)	<3 %, nominal
	1 MHz (analog)	<10 %, nominal
Shape factor 60 dB:3 dB	$\leq$ 120 kHz	<6, nominal
	1 MHz	<12, nominal

Channel filters		
Bandwidths		100, 200, 300, 500 Hz, 1, 1.5, 2, 2.4, 2.7, 3, 3.4, 4, 4.5, 5, 6, 8.5, 9, 10, 12.5, 14, 15, 16, 18 (RRC), 20, 21, 24.3 (RRC), 25, 30, 50, 100, 150, 192, 200, 300, 500 kHz, 1, 1.2288, 1.28 (RRC), 1.5, 2, 3, 3.84 (RRC), 4.096 (RRC), 5 MHz
Shape factor 60 dB:3 dB		<2, nominal
Bandwidth uncertainty		2 %, nominal
Video bandwidths		1 Hz to 10 MHz in 1/2/3/5 sequence

## Level

Display range		displayed noise floor to +30 dBm
---------------	--	----------------------------------

Maximum input level		
DC voltage	RF input AC coupled	50 V
	RF input DC coupled	0 V
CW RF power	RF attenuation 0 dB	20 dBm (= 0.1 W)
	RF attenuation $\geq 10$ dB	30 dBm (= 1 W)
Pulse spectral density		97 dB $\mu$ V/MHz
Max. pulse voltage	RF attenuation $\geq 10$ dB	150 V
Max. pulse energy	RF attenuation $\geq 10$ dB, 10 $\mu$ s	1 mWs

Intermodulation		
1 dB compression of input mixer	0 dB RF attenuation	
	$\leq 3.6$ GHz	+13 dBm, nominal
	$> 3.6$ GHz	
	R&S <sup>®</sup> FSU8	+10 dBm, nominal
	R&S <sup>®</sup> FSU26/43/46/50/67	+7 dBm, nominal
Third-order intercept point (TOI)	level $2 \times -10$ dBm, $\Delta f > 5 \times$ RBW or 10 kHz, whichever is larger	
	R&S <sup>®</sup> FSU3	
	$10 \text{ MHz} \leq f_{in} < 300 \text{ MHz}$	$> 17$ dBm, typ. 20 dBm
	$300 \text{ MHz} \leq f_{in} \leq 3.6 \text{ GHz}$	$> 19$ dBm, typ. 25 dBm
	R&S <sup>®</sup> FSU8:	
	$10 \text{ MHz} \leq f_{in} < 300 \text{ MHz}$	$> 17$ dBm, typ. 20 dBm
	$300 \text{ MHz} \leq f_{in} \leq 3.6 \text{ GHz}$	$> 20$ dBm, typ. 25 dBm
	$3.6 \text{ GHz} \leq f_{in} \leq 8 \text{ GHz}$	$> 18$ dBm, typ. 23 dBm
	R&S <sup>®</sup> FSU26, R&S <sup>®</sup> FSU43, R&S <sup>®</sup> FSU46, R&S <sup>®</sup> FSU50, R&S <sup>®</sup> FSU67	
	$10 \text{ MHz} \leq f_{in} < 300 \text{ MHz}$	$> 17$ dBm, typ. 20 dBm
	$300 \text{ MHz} \leq f_{in} < 3.6 \text{ GHz}$	$> 22$ dBm, typ. 27 dBm
	$3.6 \text{ GHz} \leq f_{in} < 26.5 \text{ GHz}$	$> 12$ dBm, typ. 15 dBm
	R&S <sup>®</sup> FSU43, R&S <sup>®</sup> FSU46	
	$26.5 \text{ GHz} \leq f_{in} \leq 40 \text{ GHz}$	$> 12$ dBm, typ. 15 dBm
	$f_{in} > 40 \text{ GHz}$	12 dBm, nominal
	R&S <sup>®</sup> FSU50	
	$26.5 \text{ GHz} \leq f_{in} < 28 \text{ GHz}$	$> 8$ dBm, typ. 11 dBm
	$28 \text{ GHz} \leq f_{in} \leq 40 \text{ GHz}$	$> 12$ dBm, typ. 15 dBm
	$f_{in} > 40 \text{ GHz}$	12 dBm, nominal
	R&S <sup>®</sup> FSU67	
	$26.5 \text{ GHz} \leq f_{in} < 28 \text{ GHz}$	$> 8$ dBm, typ. 11 dBm
	$28 \text{ GHz} \leq f_{in} \leq 40 \text{ GHz}$	$> 12$ dBm, typ. 15 dBm
$40 \text{ GHz} < f_{in} \leq 50 \text{ GHz}$	12 dBm, nominal	
$f_{in} > 50 \text{ GHz}$	9 dBm, nominal	

Second harmonic intercept (SHI)	$f_{in} < 100 \text{ MHz}$	>35 dBm
	$100 \text{ MHz} < f_{in} \leq 400 \text{ MHz}$	>45 dBm, typ. 55 dBm
	$400 \text{ MHz} < f_{in} \leq 500 \text{ MHz}$	>52 dBm, typ. 60 dBm
	$500 \text{ MHz} < f_{in} \leq 1 \text{ GHz}$	>45 dBm, typ. 55 dBm
	$1 \text{ GHz} < f_{in} \leq 1.8 \text{ GHz}$	>35 dBm
	R&S®FSU8, R&S®FSU26, R&S®FSU43, R&S®FSU46, R&S®FSU50	
	$f_{in} > 1.8 \text{ GHz}$	80 dBm, nominal
	R&S®FSU67	
	$1.8 \text{ GHz} < f_{in} \leq 4.0 \text{ GHz}$	65 dBm, nominal
$f_{in} > 4.0 \text{ GHz}$	75 dBm, nominal	

<b>Displayed average noise level</b>		
0 dB RF attenuation, termination 50 $\Omega$ , log. scaling, normalized to 1 Hz RBW $f < 10 \text{ kHz}$ : 10 Hz FFT filter, trace average, sweep count = 20 $f \geq 10 \text{ kHz}$ : RBW = 1 kHz, VBW = 3 kHz, zero span, sweep time 50 ms, sample detector, trace average, sweep count = 20, mean marker		
20 Hz		<-90 dBm
100 Hz		<-110 dBm
1 kHz		<-120 dBm
10 kHz		<-130 dBm
100 kHz		<-130 dBm
1 MHz		<-140 dBm
10 MHz		<-153 dBm
R&S®FSU3		
$20 \text{ MHz} \leq f < 2.0 \text{ GHz}$		<-155 dBm, typ. -158 dBm
$2.0 \text{ GHz} \leq f \leq 3.0 \text{ GHz}$		<-153 dBm, typ. -157 dBm
$3.0 \text{ GHz} \leq f \leq 3.6 \text{ GHz}$		<-152 dBm, typ. -156 dBm
R&S®FSU8		
$20 \text{ MHz} \leq f < 2.0 \text{ GHz}$		<-155 dBm, typ. -158 dBm
$2.0 \text{ GHz} \leq f < 3.0 \text{ GHz}$		<-153 dBm, typ. -155 dBm
$3.0 \text{ GHz} \leq f < 7 \text{ GHz}$		<-152 dBm, typ. -154 dBm
$7 \text{ GHz} \leq f \leq 8 \text{ GHz}$		<-150 dBm, typ. -152 dBm
R&S®FSU26		
$20 \text{ MHz} \leq f < 2 \text{ GHz}$		<-152 dBm, typ. -156 dBm
$2 \text{ GHz} \leq f < 3.6 \text{ GHz}$		<-150 dBm, typ. -153 dBm
$3.6 \text{ GHz} \leq f < 8 \text{ GHz}$		<-152 dBm, typ. -156 dBm
$8 \text{ GHz} \leq f < 13 \text{ GHz}$		<-150 dBm, typ. -153 dBm
$13 \text{ GHz} \leq f < 18 \text{ GHz}$		<-158 dBm, typ. -151 dBm
$18 \text{ GHz} \leq f < 22 \text{ GHz}$		<-157 dBm, typ. -150 dBm
$22 \text{ GHz} \leq f \leq 26.5 \text{ GHz}$		<-155 dBm, typ. -158 dBm
R&S®FSU43		
$20 \text{ MHz} \leq f < 2 \text{ GHz}$		<-152 dBm, typ. -156 dBm
$2 \text{ GHz} \leq f < 13 \text{ GHz}$		<-150 dBm, typ. -153 dBm
$13 \text{ GHz} \leq f < 18 \text{ GHz}$		<-148 dBm, typ. -151 dBm
$18 \text{ GHz} \leq f < 22 \text{ GHz}$		<-147 dBm, typ. -150 dBm
$22 \text{ GHz} \leq f < 26.5 \text{ GHz}$		<-145 dBm, typ. -148 dBm
$26.5 \text{ GHz} \leq f < 40 \text{ GHz}$		<-138 dBm, typ. -141 dBm
$40 \text{ GHz} \leq f \leq 43 \text{ GHz}$		<-133 dBm, typ. -138 dBm

	R&S®FSU46	
	20 MHz ≤ f < 2 GHz	<-152 dBm, typ. -156 dBm
	2 GHz ≤ f < 13 GHz	<-150 dBm, typ. -153 dBm
	13 GHz ≤ f < 18 GHz	<-148 dBm, typ. -151 dBm
	18 GHz ≤ f < 22 GHz	<-147 dBm, typ. -150 dBm
	22 GHz ≤ f < 26.5 GHz	<-145 dBm, typ. -148 dBm
	26.5 GHz ≤ f < 40 GHz	<-138 dBm, typ. -141 dBm
	40 GHz ≤ f ≤ 46 GHz	<-133 dBm, typ. -138 dBm
	R&S®FSU50	
	20 MHz ≤ f < 2 GHz	<-152 dBm, typ. -156 dBm
	2 GHz ≤ f < 13 GHz	<-150 dBm, typ. -153 dBm
	13 GHz ≤ f < 18 GHz	<-148 dBm, typ. -151 dBm
18 GHz ≤ f < 22 GHz	<-147 dBm, typ. -150 dBm	
22 GHz ≤ f < 26.5 GHz	<-145 dBm, typ. -148 dBm	
26.5 GHz ≤ f < 32 GHz	<-138 dBm, typ. -141 dBm	
32 GHz ≤ f < 46 GHz	<-133 dBm, typ. -136 dBm	
46 GHz ≤ f ≤ 50 GHz	<-128 dBm, typ. -131 dBm	
R&S®FSU67		
20 MHz ≤ f < 2 GHz	<-148 dBm, typ. -152 dBm	
2 GHz ≤ f < 13 GHz	<-144 dBm, typ. -148 dBm	
13 GHz ≤ f < 18 GHz	<-142 dBm, typ. -145 dBm	
18 GHz ≤ f < 22 GHz	<-140 dBm, typ. -144 dBm	
22 GHz ≤ f < 26.5 GHz	<-138 dBm, typ. -142 dBm	
26.5 GHz ≤ f < 40 GHz	<-136 dBm, typ. -140 dBm	
40 GHz ≤ f < 46 GHz	<-132 dBm, typ. -136 dBm	
46 GHz ≤ f < 51 GHz	<-128 dBm, typ. -132 dBm	
51 GHz ≤ f < 57 GHz	<-130 dBm, typ. -136 dBm	
57 GHz ≤ f < 65 GHz	<-126 dBm, typ. -130 dBm	
65 GHz ≤ f ≤ 67 GHz	<-120 dBm, typ. -124 dBm	

Immunity to interference		
Image frequency	f ≤ 3.6 GHz	>90 dB suppression, typ. >110 dB
	3.6 GHz < f ≤ 40 GHz	>70 dB suppression, typ. >100 dB
	40 GHz < f ≤ 50 GHz	70 dB suppression nominal
	f > 50 GHz	>47 dB suppression
	f = receive frequency	
Intermediate frequency	f ≤ 3.6 GHz	>90 dB suppression, typ. >110 dB
	3.6 GHz < f ≤ 4.2 GHz	typ. 70 dB suppression
	4.2 GHz < f ≤ 50 GHz	>70 dB suppression, typ. >90 dB
	f > 50 GHz	>47 dB suppression, typ. >50 dB
	f = receive frequency	
Spurious response	f > 1 MHz, without input signal, 0 dB RF attenuation	<-103 dBm
Other interfering signals	Δf > 100 kHz	
	mixer level <-10 dBm, f <sub>in</sub> ≤ 2.3 GHz	<-80 dBc
	mixer level <-35 dBm, 2.3 GHz < f <sub>in</sub> < 4 GHz	<-70 dBc
	mixer level <-10 dBm	
	4 GHz ≤ f < 8 GHz	<-70 dBc
	8 GHz ≤ f < 16 GHz	<-64 dBc
	16 GHz ≤ f < 26 GHz	<-58 dBc
	26.5 GHz ≤ f < 40 GHz	<-52 dBc
	40 GHz ≤ f < 50 GHz	<-52 dBc, nominal
	50 GHz ≤ f < 64 GHz	<-47 dBc, nominal
	64 GHz ≤ f ≤ 67 GHz	<-43 dBc, nominal
f = receive frequency		

<b>Level display</b>		
Screen		625 × 500 pixel (one diagram), max. 2 diagrams with independent settings
Logarithmic level axis		1 dB to 200 dB, in steps of 1/2/5
Linear level axis		10 % of reference level per level division, 10 divisions or logarithmic scaling
Number of traces	1 measurement diagram	3
	2 measurement diagrams	6
Trace detector		Max Peak, Min Peak, Auto Peak (Normal), sample, RMS, average,
	EMI detectors	Quasi Peak, CISPR-RMS, CISPR-Av
Number of measurement points	default value	625
	range	155 to 30001 in steps of about a factor of 2
Trace functions		Clear/Write, Max Hold, Min Hold, average
Trace update rate	local measurement, display update rate, 625 points, zero span	80 per second
	remote measurement, display OFF	
	zero span / sweep time 1 ms	70 per second
	span = 10 MHz, sweep time 2.5 ms	50 per second
Setting range of reference level	logarithmic level display	-130 dBm to (+5 dBm + RF attenuation), max. 30 dBm, in steps of 0.1 dB
	linear level display	7.0 nV to 7.07 V in steps of 1 %
Units of level axis	logarithmic level display	dBm, dB $\mu$ V, dBmV, dB $\mu$ A, dBpW
	linear level display	$\mu$ V, mV, $\mu$ A, mA, pW, nW

<b>Level measurement uncertainty</b>		
Absolute level uncertainty at 128 MHz	RBW = 10 kHz, level -30 dBm, reference level -30 dBm, RF attenuation 10 dB	<0.2 dB ( $\sigma = 0.07$ dB)
Frequency response referenced to 128 MHz	DC coupling, RF attenuation $\geq 10$ dB, +20 °C to +30 °C	
	10 MHz $\leq f < 3.6$ GHz	<0.3 dB ( $\sigma = 0.1$ dB)
	3.6 GHz $\leq f < 8$ GHz, span < 1 GHz	<1.5 dB ( $\sigma = 0.5$ dB)
	8 GHz $\leq f < 22$ GHz, span < 1 GHz	<2 dB ( $\sigma = 0.7$ dB)
	22 GHz $\leq f < 40$ GHz, span < 1 GHz	<2.5 dB ( $\sigma = 0.8$ dB)
	40 GHz $\leq f < 50$ GHz, span < 1 GHz	<3 dB ( $\sigma = 1.0$ dB)
	50 GHz $\leq f \leq 67$ GHz, span < 1 GHz	<4 dB ( $\sigma = 1.3$ dB)
	RF attenuation > 40 dB or $f \geq 3.6$ GHz, span $\geq 1$ GHz	add 0.5 dB to above values
	+5 °C to +45 °C	
	10 MHz $\leq f < 3.6$ GHz	<0.6 dB ( $\sigma = 0.2$ dB)
	3.6 GHz $\leq f < 26.5$ GHz	add 0.5 dB to above values
	26.5 GHz $\leq f < 50$ GHz	add 1.0 dB to above values
	$f \geq 50$ GHz	add 1.5 dB to above values
	RF attenuation > 40 dB or $f \geq 3.6$ GHz, span $\geq 1$ GHz	add 0.5 dB to above values
Attenuator switching uncertainty	DC coupling, RF attenuation $\geq 10$ dB, +20 °C to +30 °C	
	10 MHz $\leq f < 3.6$ GHz	<0.3 dB ( $\sigma = 0.1$ dB)
Uncertainty of reference level setting	$f = 128$ MHz	<0.2 dB ( $\sigma = 0.07$ dB)
	0 dB to 70 dB, referenced to 10 dB attenuation	
Uncertainty of reference level setting	RF attenuation 10 dB, referenced to -10 dBm reference level setting	<0.15 dB ( $\sigma = 0.05$ dB)



<b>Display nonlinearity</b>	+20 °C to +30 °C, mixer level ≤−10 dBm)	
Logarithmic level display	RBW ≤ 100 kHz or channel filters, S/N >20 dB	
	0 dB to −70 dB	<0.1 dB (σ = 0.03 dB)
	−70 dB to −90 dB	<0.3 dB (σ =0.1 dB)
	200 kHz ≤ RBW ≤10 MHz, S/N >16 dB	
	0 dB to −50 dB	<0.2 dB (σ =0.07 dB)
	−50 dB to −70 dB	<0.5 dB (σ =0.17 dB)
	RBW >10 MHz, S/N >16 dB	
	0 dB to −50 dB	<0.5 dB (σ =0.17 dB)
Linear level display		5 % of reference level
Bandwidth switching error	referenced to RBW = 10 kHz	
	1 Hz to 100 kHz	<0.1 dB (σ =0.03 dB)
	200 kHz to 3 MHz	<0.2 dB (σ =0.07 dB)
	5 MHz to 50 MHz	<0.5 dB (σ =0.15 dB)
	FFT filter 1 Hz to 3 kHz	<0.2 dB (σ =0.07 dB)

<b>Total measurement uncertainty</b>		
	signal level 0 dB to−70 dB below reference level, S/N >20 dB, 10 dB ≤ RF attenuation ≤ 40 dB, span/RBW <100, 95 % confidence level, +20 °C to +30 °C, mixer level ≤−10 dBm	
	f < 3.6 GHz, RBW ≤100 kHz	0.3 dB
	f < 3.6 GHz, RBW >100 kHz	0.5 dB
	3.6 GHz ≤ f < 8 GHz	1.2 dB
	8 GHz ≤ f < 22 GHz	1.5 dB
	22 GHz ≤ f < 40 GHz	1.8 dB
	40 GHz ≤ f < 50 GHz	2.2 dB
	50 GHz ≤ f < 67 GHz	2.8 dB

## I/Q data

Interface		GPIB or LAN interface
Memory length		max. 512 k samples I and Q
Sample length		24 bit, each I and Q
Sample rate	settable in steps of 0.5 (32 MHz × 2 <sup>-n</sup> , n = 0 to 11)	15.625 kHz to 32 MHz
Max. signal bandwidth	sample rate ≤2 MHz	0.8 × sample rate
	4 MHz	2.8 MHz
	8 MHz	4.8 MHz
	16 MHz	7 MHz
	32 MHz	9 MHz
IF pre-filter bandwidth		300 kHz to 10 MHz, 1/2/3/5 steps

## Audio demodulation

AF demodulation types		AM and FM
Audio output		loudspeaker and phone jack
Marker stop time in spectrum mode		100 ms to 60 s

## Trigger functions

<b>Trigger</b>		
Trigger source		free run, video, external, IF level (mixer level 10 dBm to -50 dBm)
Trigger offset	span $\geq 10$ Hz	125 ns to 100 s, resolution min. 125 ns (or 1 % of offset)
	span = 0 Hz	$\pm$ (125 ns to 100 s), resolution min. 125 ns, dependent on sweep time
Max. deviation of trigger offset		$\pm$ (31.25 ns + (0.1 % $\times$ trigger offset))
<b>Gated sweep</b>		
Gate source		external, IF level, video
Gate delay		1 $\mu$ s to 100 s
Gate length		125 ns to 100 s, resolution min. 125 ns or 1 % of gate length
Max. deviation of gate length		$\pm$ (31.25 ns + (0.05 % $\times$ gate length))

## Inputs and outputs (front panel)

<b>RF input</b>		
Impedance		50 $\Omega$
Connector	R&S <sup>®</sup> FSU3, R&S <sup>®</sup> FSU8	N female
	R&S <sup>®</sup> FSU26	test port adapter APC 3.5 mm/N female
	R&S <sup>®</sup> FSU43, R&S <sup>®</sup> FSU46	test port adapter 2.92 mm (K)/N female
	R&S <sup>®</sup> FSU50	test port adapter 2.4 mm/N female
	R&S <sup>®</sup> FSU67	1.85 mm/V female
VSWR	RF attenuation $\geq 10$ dB, DC coupled	
	f < 3.6 GHz	<1.5
	R&S <sup>®</sup> FSU8:	
	3.6 GHz $\leq$ f < 8 GHz	<2
	R&S <sup>®</sup> FSU26, R&S <sup>®</sup> FSU43, R&S <sup>®</sup> FSU46, R&S <sup>®</sup> FSU50, R&S <sup>®</sup> FSU67:	
	3.6 GHz $\leq$ f < 18 GHz	<1.8
	18 GHz $\leq$ f < 26.5 GHz	<2.0
	26.5 GHz $\leq$ f < 40 GHz	<2.5
	40 GHz $\leq$ f < 50 GHz	<3, nominal
	50 GHz $\leq$ f $\leq$ 67 GHz	<3.5, nominal
	RF attenuation < 10 dB or AC coupled	1.5, typical
Setting range of attenuator		0 dB to 75 dB, in 5 dB steps

<b>Probe power supply</b>		
Supply voltages		+15 V DC, -12.6 V DC and ground, max. 150 mA, nominal
<b>Power supply for antennas etc</b>		5-pin connector
Supply voltages		$\pm$ 10 V and ground, max. 100 mA, nominal
<b>Power supply for noise source</b>		BNC female
Output voltage		0 V and 28 V, switchable, nominal
<b>USB interface</b>		type A plug, version 2.0

<b>AF output</b>		
Connector		3.5 mm mini jack
Output impedance		10 $\Omega$
Open-circuit voltage		up to 1.5 V, adjustable

## Inputs and outputs (rear panel)

<b>IF 20.4 MHz</b>		BNC female
Impedance		50 $\Omega$
Bandwidth	RBW $\leq$ 30 kHz	1.67 $\times$ resolution bandwidth, min. 2.6 kHz
	RBW = 50 kHz, 100 kHz	400 kHz
	200 kHz $\leq$ RBW $\leq$ 10 MHz	equal to resolution bandwidth
Level	RBW $\leq$ 100 kHz, FFT filter, mixer level $>$ -70 dBm	-20 dBm at reference level
	RBW = 200 kHz to 10 MHz, mixer level $>$ -50 dBm	0 dBm at reference level

<b>IF 404.4 MHz</b>	not available with R&S <sup>®</sup> FSU43, active only if RBW $>$ 10 MHz	BNC female
Impedance		50 $\Omega$
Bandwidth	RBW $>$ 10 MHz	equal to resolution bandwidth
Level	mixer level $\leq$ 0 dBm	typ. 10 dB below mixer level

<b>Video output</b>		BNC female
Impedance		50 $\Omega$
Output voltage	RBW $\geq$ 200 kHz, logarithmic scaling, full scale	0 V to 1 V (EMF)

<b>Reference output</b>		BNC female
Impedance		50 $\Omega$
Output frequency	internal reference	10 MHz
	external reference	same as reference input signal
Level		$>$ 0 dBm, nominal

<b>Reference input</b>		BNC female
Impedance		50 $\Omega$
Input frequency range		1 MHz $\leq$ $f_m$ $\leq$ 20 MHz, in 1 Hz steps
Required level		$>$ 0 dBm from 50 $\Omega$

<b>Sweep output</b>		BNC female
Output voltage		0 V to 5 V, proportional to displayed frequency

<b>External trigger/gate input</b>		BNC female
Trigger voltage		0.5 to 3.5 V
Input impedance		$\geq$ 10 k $\Omega$

<b>IEC/IEEE bus control</b>		interface to IEC 625-2 (IEEE 488.2)
Command set		SCPI 1997.0 or HP8566 compatible
Connector		24-pin Amphenol female
Interface functions		SH1, AH1, T6, L4, SR1, RL1, PP1, DC1, DT1, C0

<b>LAN interface</b>		10/100 BaseT, RJ45
<b>USB interface</b>		type A plug, version 2.0
<b>Serial interface</b>		RS-232-C (COM), 9-pin female connectors
<b>Printer interface</b>		parallel (Centronics compatible)
<b>Mouse interface</b>		PS/2 compatible
<b>Connector for external monitor (VGA)</b>		15-pin D-sub

## General specifications

<b>Display</b>		21 cm LC TFT colour display (8.4")
Resolution		800 × 600 pixel (SVGA resolution)
Pixel failure rate		$<1 \times 10^{-5}$

<b>Mass memory</b>		
Mass memory		1.44 Mbyte 3 1/2" disk drive, hard disk, USB flash disk (not supplied)
Data storage		>500 instrument settings and traces
Mass memory	R&S®FSU-B20 option	hard disk replaced by a flash disk

<b>Temperature</b>		
Temperature	operating temperature range	+5° C to +40° C
	permissible temperature range	+0° C to +50° C
	storage temperature range	-40° C to +70° C
	R&S®FSU-B20 option	
	operating temperature range	0° C to +50° C
	permissible temperature range	0° C to +55° C
Climatic loading		+40° C at 95 % relative humidity (DIN EN 60068-2-30: 2000-02)

<b>Mechanical resistance</b>		
Vibration		
sinusoidal		5 Hz to 150 Hz, max. 2 g at 55 Hz; 0.5 g from 55 Hz to 150 Hz; meets DIN EN 60068-2-6: 1996-05, DIN EN 60068-2-30: 2000-02, DIN EN 61010-1, MIL-T-28800D, class 5
random		10 Hz to 100 Hz, acceleration 1 g (RMS)
Shock		40 g shock spectrum, meets MIL-STD-810C and MIL-T-28800D, classes 3 and 5
	R&S®FSU-B20 option: random vibration	10 Hz to 300 Hz, acceleration 1.9 g (RMS)
Recommended calibration interval	operation with external reference	2 years
	operation with internal reference	1 year
RFI suppression		in line with European EMC Directive 89/336/EEC and the new EMC Directive 2004/108/EC including: IEC/EN 61326 Class B (Emission) CISPR 11/EN 55011/ Group 1 Class B (Emission) IEC/EN 61326 Table A.1 (Immunity, Industrial)

<b>Power supply</b>		
AC supply		100 V to 240 V, 3.1 A to 1.3 A; 50 Hz to 400 Hz, class of protection I to VDE 411
Power consumption	R&S®FSU3, R&S®FSU8	typ. 130 VA
	R&S®FSU26, R&S®FSU43, R&S®FSU46, R&S®FSU50, R&S®FSU67	typ. 150 VA
Safety		in line with EN 61010-1, UL 3111-1, CSA C22.2 No. 1010-1, DIN EN 61010-1
Test mark		VDE, GS, CSA, CSA-NRTL
Dimensions	W × H × D	435 mm × 192 mm × 460 mm (17,13 in × 7,56 in × 18,11 in)
Weight Net, without options, nominal	R&S®FSU3	14.6 kg (32.2 lb)
	R&S®FSU8	15.4 kg (33.95 lb)
	R&S®FSU26	16.5 kg (36.4 lb)
	R&S®FSU43, R&S®FSU46, R&S®FSU50	16.8 kg (37.0 lb)
	R&S®FSU67	17.4 kg (38.3 lb)

# R&S® FSU-B9 tracking generator, R&S® FSU-B12 attenuator for tracking generator (not available for R&S® FSU67)

Unless specified otherwise, specifications not valid for frequency range from  $-3 \times \text{RBW}$  to  $+3 \times \text{RBW}$ , however at least not valid from  $-100 \text{ kHz}$  to  $+100 \text{ kHz}$ . Maximum output level  $+5 \text{ dBm}$  (peak modulation in the case of amplitude-modulated signals).

Frequency		
Frequency range		100 kHz to 3.6 GHz
Resolution		1 Hz
Frequency offset		
Setting range		$\pm 200 \text{ MHz}$
Resolution		1 Hz

Spectral purity		
SSB phase noise	f = 500 MHz, carrier offset 10 kHz	
	normal mode	typ. $-120 \text{ dBc}$ (1 Hz)
	with frequency offset	typ. $-110 \text{ dBc}$ (1 Hz)
	with FM modulation on	typ. $-110 \text{ dBc}$ (1 Hz)

Level		
Level setting range		$-30 \text{ dBm}$ to $+5 \text{ dBm}$ in steps of $0.1 \text{ dB}$
	with option R&S® FSU-B12	$-100 \text{ dBm}$ to $+5 \text{ dBm}$ in steps of $0.1 \text{ dB}$

Max. deviation of output level		
Absolute	f = 128 MHz, output level $-20 \text{ dBm}$ to $0 \text{ dBm}$	$<1 \text{ dB}$ ( $\sigma = 0.34 \text{ dB}$ )
Frequency response	referenced to level at 128 MHz, sweep time $>100 \text{ ms}$ , $+5 \text{ }^\circ\text{C}$ to $+45 \text{ }^\circ\text{C}$	
	output level $-20 \text{ dBm}$ to $0 \text{ dBm}$ , 100 kHz to 3.6 GHz	$<3 \text{ dB}$ , typ. $1.9 \text{ dB}$
	output level $-30 \text{ dBm}$ to $-20 \text{ dBm}$ , f = 100 kHz to 3.6 GHz	$3 \text{ dB}$
	additional deviation with R&S® FSU-B12, 100 kHz to 3.6 GHz	$<1 \text{ dB}$

Dynamic range		
Attenuation measurement range	RBW = 1 kHz, f $>10 \text{ MHz}$	100 dB
Harmonics	output level $-10 \text{ dBm}$	typ. $-30 \text{ dBc}$
Spurious, nonharmonics	output level $0 \text{ dBm}$	typ. $-30 \text{ dBc}$

Level sweep		
Level range		0 to $-25 \text{ dBm}$
Max. deviation of output level	f = 100 kHz to 2 GHz	
	output level $0 \text{ dBm}$ to $-5 \text{ dBm}$	$<1.5 \text{ dB}$
	output level $-5 \text{ dBm}$ to $-15 \text{ dBm}$	$<2 \text{ dB}$
	output level $-15$ to $-25 \text{ dBm}$	$<3 \text{ dB}$
	f = 2 GHz to 3 GHz	
output level $0 \text{ dBm}$ to $-25 \text{ dBm}$	$<3 \text{ dB}$	

<b>Modulation</b>		
Modulation format	external	I/Q, AM, FM
Input voltage	full scale	
	AM, FM, $V_{pp}$	1 V
	I/Q	$\sqrt{U_i^2 + U_q^2} = 0.5 \text{ V}$
<b>AM</b>	$f_{\text{Center}} > f_{\text{Mod}}$ , span = 0 Hz	
Modulation depth		0 % to 99 %
Modulation frequency response	0 Hz to 5 MHz	1 dB
	0 Hz to 30 MHz	3 dB
<b>FM</b>	$f_{\text{Center}} > f_{\text{Mod}}$ , span = 0 Hz	
Frequency deviation		full range: 100 Hz, 1 kHz, 10 kHz, 100 kHz, 1 MHz
Modulation frequency range	deviation $\leq 10$ MHz	0 Hz to 1 kHz
	deviation $\leq 1$ MHz	0 Hz to 100 kHz
Modulation frequency response	0 kHz to 100 kHz	1 dB
<b>I/Q modulation</b>	$f_{\text{Center}} > f_{\text{Mod}}$ , span = 0 Hz	
Modulation frequency response	0 Hz to 5 MHz	1 dB
	0 Hz to 30 MHz	3 dB
<b>Modulation deviation of tracking generator</b>	I/Q modulation, typical values, baseband signals generated by the R&S® AMIQ	
EVM	NADC/TETRA/PDC	
	RMS	2 %
	peak	4 %
	PHS	
	RMS	2 %
Phase error	GSM/DCS1800/PCS1900	
	RMS	1.5°
	peak	5°
Rho factor	IS-95 CDMA	0.997

<b>Inputs and outputs (front panel)</b>		
RF output		N female, 50 $\Omega$
VSWR	$100 \text{ kHz} \leq f \leq 2 \text{ GHz}$	1.2
	$2 \text{ GHz} \leq f \leq 3.6 \text{ GHz}$	1.5

<b>Inputs and outputs (rear panel)</b>		
TG I/AM IN		BNC female
Impedance		50 $\Omega$
Input voltage	$V_{pp}$	1 V
TG Q/FM IN		BNC female
Impedance		50 $\Omega$ ,
Input voltage	$V_{pp}$	1 V

## R&S® FSU-B21 LO/IF ports for external mixers (for R&S® FSU26/43/46/50/67 only)

LO signal		
Frequency range		7.0 GHz to 15.5 GHz
Level	+20 °C to +30 °C	+15.0 dBm ±1 dB
	+5 °C to +45 °C	+15.0 dBm ±3 dB

IF input		
IF frequency		404.4 MHz
Full scale level	2-port mixer (LO output / IF input, front panel)	-20 dBm
	3-port mixer (IF input, front panel)	-20 dBm
Level uncertainty	IF input level -30 dBm, RBW 30 kHz, 2-port mixer, LO output/IF input (front panel)	
	+20 °C to +30 °C	<1 dB
	+5 °C to +45 °C	<3 dB
	3-port mixer, IF input (front panel)	
	+20 °C to +30 °C	<1 dB
	+5 °C to +45 °C	<3 dB

Inputs and outputs (front panel)		
LO output / IF input		SMA female, 50 Ω
IF input		SMA female, 50 Ω

## R&S® FSU-B23 RF preamplifier (for R&S® FSU26 only, requires R&S® FSU-B25 option)

Level measurement uncertainty		
Frequency response	preamplifier = ON	
	3.6 GHz to 8 GHz	<2.0 dB ( $\sigma = 0.7$ dB)
	8 GHz to 22 GHz	<2.5 dB ( $\sigma = 0.8$ dB)
	22 GHz to 26.5 GHz	<3.0 dB ( $\sigma = 1$ dB)

Displayed average noise level		
0 dB RF attenuation, termination 50 Ω, RBW = 1 kHz, VBW = 3 kHz, zero span, sweep time 50 ms, sample detector, log. scaling, trace average, sweep count = 20, mean marker, normalized to 1 Hz RBW		
preamplifier = OFF		
3.6 GHz to 8 GHz		R&S® FSU26 specifications + 2 dB
8 GHz to 26.5 GHz		R&S® FSU26 specifications + 3 dB
preamplifier = ON		
3.6 GHz to 8 GHz		<-162 dBm, typ. -165 dBm
8 GHz to 13 GHz		<-159 dBm, typ. -162 dBm
13 GHz to 18 GHz		<-157 dBm, typ. -160 dBm
18 GHz to 22 GHz		<-154 dBm, typ. -159 dBm
22 GHz to 26.5 GHz		<-150 dBm, typ. -155 dBm

## R&S® FSU-B25 electronic attenuator

Frequency		
Frequency range	R&S® FSU3, R&S® FSU26, R&S® FSU43, R&S® FSU46, R&S® FSU50	
	electronic attenuator	10 MHz to 3.6 GHz
	preamplifier	100 kHz <sup>2</sup> , 10 MHz to 3.6 GHz
	R&S® FSU8	
	electronic attenuator	10 MHz to 8 GHz
	preamplifier	100 kHz <sup>2</sup> , 10 MHz to 8 GHz

Setting range		
Electronic attenuator		0 dB to 30 dB, in 5 dB steps
Preamplifier		20 dB, switchable

Level measurement uncertainty		
Frequency response	with preamplifier or electronic attenuator	
	10 MHz to 50 MHz	<1 dB ( $\sigma = 0.34$ dB)
	50 MHz to 3.6 GHz	<0.6 dB ( $\sigma = 0.2$ dB)
	3.6 MHz to 8 GHz	<2.0 dB ( $\sigma = 0.7$ dB)
Reference error	at 128 MHz, RBW $\leq$ 100 kHz, reference level -30 dBm, RF attenuation 10 dB	
	electronic attenuator	<0.3 dB ( $\sigma = 0.1$ dB)
	preamplifier	<0.3 dB ( $\sigma = 0.1$ dB)

Displayed average noise level		
0 dB RF attenuation, termination 50 $\Omega$ , RBW = 1 kHz, VBW = 3 kHz, zero span, sweep time 50 ms, sample detector, log. scaling, trace average, sweep count = 20, mean marker, normalized to 1 Hz RBW		
preamplifier = ON		
R&S® FSU3, R&S® FSU8, R&S® FSU26		
	10 MHz to 2.0 GHz	<-162 dBm
	2.0 GHz to 3.6 GHz	<-160 dBm
R&S® FSU8		
	3.6 GHz to 8 GHz	<-157 dBm
R&S® FSU43, R&S® FSU46, R&S® FSU50		
	10 MHz to 40 MHz	<-160 dBm
	40 MHz to 2 GHz	<-162 dBm
	2 GHz to 3.6 GHz	<-160 dBm
with the R&S® FSU-B25 built in, the average noise level values displayed by the base units degrade by (R&S® FSU-B25 off):		
	20 Hz to 3.6 GHz	1 dB
R&S® FSU8		
	3.6 GHz to 8 GHz	2 dB
preamplifier = OFF, electronic attenuator 0 dB		
	20 Hz to 3.6 GHz	typ. 2.5 dB
R&S® FSU8		
	3.6 GHz to 8 GHz	typ. 3.5 dB

Intermodulation		
Third-order intercept point (TOI)	electronic attenuator ON, $\Delta f > 5 \times$ RBW or 10 kHz	
	10 MHz to 300 MHz	>17 dBm
	300 MHz to 3.6 GHz	>20 dBm
	3.6 GHz to 8 GHz	>18 dBm

<sup>2</sup> Valid as of electronic attenuator board stock number 1137.0724.02 (see instrument HW info).



## R&S® FSU-B27 broadband FM demodulator output

<b>Frequency deviation</b>		
Frequency deviation		≤5 MHz
Deviation + modulation frequency		≤5 MHz
FM slope	load impedance 50 Ω	280 mV/MHz ± 20 %
<b>Frequency response</b>		
	DC to 1MHz (<1 MHz deviation)	<0.4 dB
	4 MHz (<1MHz deviation)	typ. 3 dB
<b>Distortion</b>		
	1 MHz deviation + 1 MHz modulation frequency	>30 dBc
<b>Residual FM</b>		
	LF-lowpass 100 kHz	<100 Hz RMS
Lowpass filters	3-dB bandwidth	30 kHz, 100 kHz, 300 kHz, 1 MHz

## Ordering information

Designation	Type	Order No.
Spectrum Analyzer 20 Hz to 3.6 GHz	R&S®FSU3	1166.1660.03
Spectrum Analyzer 20 Hz to 8 GHz	R&S®FSU8	1166.1660.08
Spectrum Analyzer 20 Hz to 26.5 GHz	R&S®FSU26	1166.1660.26
Spectrum Analyzer 20 Hz to 43 GHz	R&S®FSU43	1166.1660.43
Spectrum Analyzer 20 Hz to 46 GHz	R&S®FSU46	1166.1660.46
Spectrum Analyzer 20 Hz to 50 GHz	R&S®FSU50	1166.1660.50
Spectrum Analyzer 20 Hz to 67 GHz	R&S®FSU67	1166.1660.67
<b>Accessories supplied</b>		
Power cable, printed quick start guide and CD-ROM (with operating manual and service manual)		
R&S®FSU26: test port adapter with 3.5 mm female (1021.0512.00) and N female (1021.0535.00) connector		
R&S®FSU43, R&S®FSU46: test port adapter with 2.92 mm (K) female (1036.4790.00) and N female (1036.4777.00) connector		
R&S®FSU50: test port adapter with 2.4 mm female (1088.1627.02) and N female (1036.4777.00) connector		

## Options

Designation	Type	Order No.	Retrofittable	Remarks
<b>Options</b>				
OCXO, low aging/improved phase noise at 10 Hz carrier offset	R&S®FSU-B4	1144.9000.02	yes	
Tracking Generator, 100 kHz to 3.6 GHz	R&S®FSU-B9	1142.8994.02	yes	not available for R&S®FSU67
External Generator Control	R&S®FSP-B10	1129.7246.03	yes	
Output Attenuator, 0 dB to 70 dB, for R&S®FSU-B9	R&S®FSU-B12	1142.9349.02	yes	requires R&S®FSU-B9, not available for R&S®FSU67
Removable Hard Disk	R&S®FSU-B18	1303.0400.02	no	excludes R&S®FSU-B20
Second Hard Disk for R&S®FSU-B18	R&S®FSU-B19	1303.0600.02		requires R&S®FSU-B18
Extended Environmental Specifications	R&S®FSU-B20	1155.1606.11	no	
LO/IF Ports for External Mixers	R&S®FSU-B21	1157.1090.02	yes	only for R&S®FSU26, R&S®FSU43, R&S®FSU46, R&S®FSU50, R&S®FSU67
20 dB Preamplifier, 3.6 GHz to 26.5 GHz, for R&S®FSU26	R&S®FSU-B23	1157.0907.02	no	only for R&S®FSU26, requires R&S®FSU-B25
Electronic Attenuator, 0 dB to 30 dB, and 20 dB Preamplifier (3.6 GHz)	R&S®FSU-B25	1144.9298.02	yes	not available for R&S®FSU67
Broadband FM demodulator output, max. dev. 5 MHz	R&S®FSU-B27	1157.2000.02	yes	
Vector signal analyzer	R&S®FSU-B73	1169.5696.03	no	not available for R&S®FSU67
<b>Firmware/Software</b>				
GSM/EDGE Application Firmware	R&S®FS-K5	1141.1496.02		
FM Measurement Demodulator	R&S®FS-K7	1141.1796.02		
Bluetooth® Application Firmware	R&S®FS-K8	1157.2568.02		
Power Sensor Measurements	R&S®FS-K9	1157.3006.02		
Application Firmware for Noise Figure and Gain Measurements	R&S®FS-K30	1300.6508.02		preamplifier (e.g. R&S®FSU-B25) recommended
Application Firmware for Phase Noise Measurement	R&S®FS-K40	1161.8138.02		
3GPP BTS/Node B FDD Application Firmware	R&S®FS-K72	1154.7000.02		
3GPP UE FDD Application Firmware (incl HSUPA)	R&S®FS-K73	1154.7252.02		
3GPP HSDPA BTS Application Firmware	R&S®FS-K74	1300.7156.02		requires R&S®FS-K72
3GPP TD-SCDMA BTS Application Firmware	R&S®FS-K76	1300.7291.02		
3GPP TD-SCDMA UE Application Firmware	R&S®FS-K77	1300.8100.02		
CDMA2000®/IS-95(cdmaOne)/1xEV-DV BTS Application Firmware	R&S®FS-K82	1157.2316.02		
CDMA2000® 1xEV-DV MS Application Firmware	R&S®FS-K83	1157.2416.02		
CDMA2000® 1xEV-DO BTS Application Firmware (incl Rev A)	R&S®FS-K84	1157.2851.02		
CDMA2000® 1xEV-DO MS Application Firmware	R&S®FS-K85	1300.6689.02		

## Recommended extras

Designation	Type	Order No.
Headphones		0708.9010.00
Printed manuals (includes operating and service manual)		1166.1883.32
IEC/IEEE Bus Cable, 1 m	R&S®PCK	0292.2013.10
IEC/IEEE Bus Cable, 2 m	R&S®PCK	0292.2013.20
19" Rack Adapter	R&S®ZZA-411	1096.3283.00
Adapter for mounting on telescopic rails (only with 19" Adapter R&S®ZZA-411)	R&S®ZZA-T45	1109.3774.00
<b>Matching pads, 50/75 Ω</b>		
L Section, matching at both ends	R&S®RAM	0358.5414.02
Series Resistor, 25 Ω, matching at one end (taken into account in instrument function RF INPUT 75 Ω)	R&S®RAZ	0358.5714.02
<b>SWR bridges, 50 Ω</b>		
SWR Bridge, 5 MHz to 3 GHz	R&S®ZRB2	0373.9017.5X
SWR Bridge, 40 kHz to 4 GHz	R&S®ZRC	1039.9492.5X
<b>High power attenuators</b>		
100 W, 3/6/10/20/30 dB, 1 GHz	R&S®RBU100	1073.8495.XX (XX = 03/06/10/20/30)
50 W, 3/6/10/20/30 dB, 2 GHz	R&S®RBU50	1073.8695.XX (XX = 03/06/10/20/30)
50 W, 20 dB, 6 GHz	R&S®RDL50	1035.1700.52
<b>Connectors and cables</b>		
Probe power connector, 3 pin		1065.9480.00
<b>DC blocks</b>		
DC Block, 10 kHz to 18 GHz (type N)	R&S®FSE-Z4	1084.7443.02
<b>External harmonic mixers (for R&amp;S®FSU26/43/46/50 with R&amp;S®FSU-B21 option)</b>		
Harmonic Mixer 40 GHz to 60 GHz	R&S®FS-Z60	1089.0799.02
Harmonic Mixer 50 GHz to 75 GHz	R&S®FS-Z75	1089.0847.02
Harmonic Mixer 60 GHz to 90 GHz	R&S®FS-Z90	1089.0899.02
Harmonic Mixer 75 GHz to 110 GHz	R&S®FS-Z110	1089.0976.03
<b>For R&amp;S®FSU26 only:</b>		
Test port adapter N male		1021.0541.00
Test port adapter 3.5 mm male		1021.0529.00
Microwave Measurement Cable with test port adapter set N male and 3.5 mm male	R&S®FSE-Z15	1046.2002.02
<b>For R&amp;S®FSU43 and R&amp;S®FSU46 only:</b>		
Test port adapter N male		1036.4783.00
Test port adapter K male		1036.4802.00
Test port adapter 2.4 mm female	R&S®FSE-Z5	1088.1627.02
<b>For R&amp;S®FSU50 only:</b>		
Test port adapter N male		1036.4783.00
Test port adapter K female		1036.4790.00
Test port adapter K male		1036.4802.00

CDMA2000® is a registered trademark of the Telecommunications Industry Association (TIA -USA).

The Bluetooth® word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by Rohde & Schwarz is under license.



For product brochure, see PD 0758.0016.12  
and [www.rohde-schwarz.com](http://www.rohde-schwarz.com)  
(search term: FSU)



**ROHDE & SCHWARZ**

[www.rohde-schwarz.com](http://www.rohde-schwarz.com)

Europe: +49 1805 12 4242, [customersupport@rohde-schwarz.com](mailto:customersupport@rohde-schwarz.com)  
USA and Canada: +1-888-837-8772, [customer.support@rsa.rohde-schwarz.com](mailto:customer.support@rsa.rohde-schwarz.com)  
Asia: +65 65 130 488, [customersupport.asia@rohde-schwarz.com](mailto:customersupport.asia@rohde-schwarz.com)